


**CONFIGURATION**

<b>X</b>	Control	Not Adjustable
<b>E</b>	Cracking Pressure	75 psi (5 bar)
<b>N</b>	Seal Material	Buna-N
<b>(none)</b>	Material/Coating	

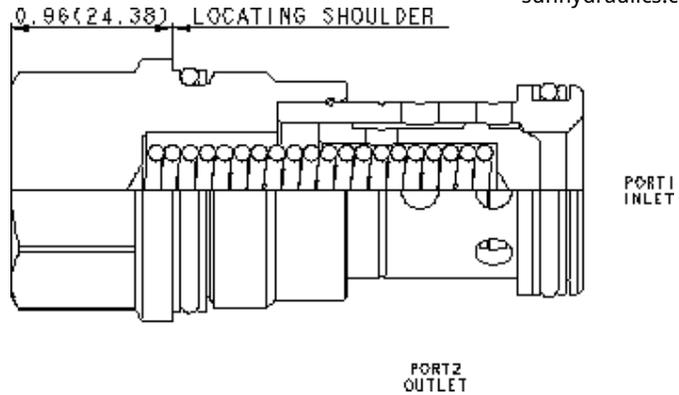

Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

**TECHNICAL DATA**

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990016007
Seal kit - Cartridge	EPDM: 990016014
Seal kit - Cartridge	Polyurethane: 990016002
Seal kit - Cartridge	Viton: 990016006

**CONFIGURATION OPTIONS**

Model Code Example: CXHAXEN

CONTROL	(X) CRACKING PRESSURE	(E) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>E</b> 75 psi (5 bar)	<b>N</b> Buna-N	Standard Material/Coating
L Manual Override	A 4 psi (0,3 bar)	E EPDM	/AP Stainless Steel, Passivated
	C 30 psi (2 bar)	V Viton	/LH Mild Steel, Zinc-Nickel
	B 15 psi (1 bar)		
	D 50 psi (3,5 bar)		
	F 100 psi (7 bar)		