




Counterbalance, On A, Pilot from B




Counterbalance, On B, Pilot from A




Pilot Operated Check, On A Pilot from B




Pilot Operated Check, On B Pilot from A




Reducing, On A drain to B




Reducing, On B drain to A



Reducing/Relieving, On A tank to B



Reducing/Relieving, On B tank to A

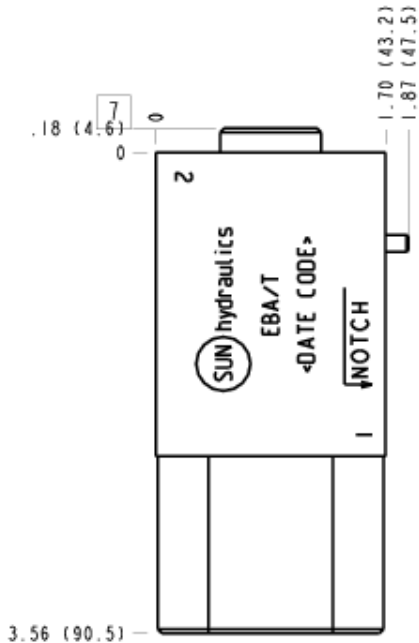

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	On A or B, port 3 to opposite side
Stack Height	44,5 mm
Seal Plate Included (see notes)	Yes

CONFIGURATION

/T Modifier 65-45-12 Ductile Iron, Metric, Buna-N,
Dewatering Oil

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
EBA, /10, /11, /15, /16, /S, /S3, /N, /Y, /Y3	Gage Port (Plugged): 1/4" NPTF;
EBA/1A, /1B, /1F, /1G, /M, /T, /T3, /W, /W3, /Z	Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	1
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1
850-004-250	Plug	1

CONFIGURATION OPTIONS

Model Code Example: EBA/T

MODIFIER (T)

- /T 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
- 6061-T651 Aluminum, Buna-N
- /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/V 6061-T651 Aluminum, Viton
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/M 6061-T651 Aluminum, Metric, Buna-N
/1B 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1A 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/Z 6061-T651 Aluminum, Metric, Viton
/1G 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1F 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil
/Y4 65-45-12 Ductile Iron, Viton, Chem. Black
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
/T4 65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
/T3 65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
/W 65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil
/W4 65-45-12 Ductile Iron, Metric, Viton, Chem. Black
/W3 65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer