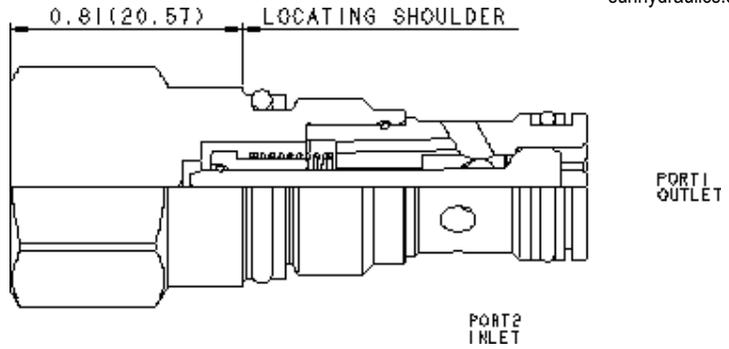

CONFIGURATION

X	Control	Not Adjustable
A	Nominal Control Pressure	4 psi (0,3 bar)
V	Seal Material	Viton
(none) Material/Coating		



Free-flow, side-to-nose check valves are on/off circuit components that allow free flow from the inlet (port 2) to the outlet (port 1) and block flow in the opposite direction.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990162007
Seal kit - Cartridge	EPDM: 990162014
Seal kit - Cartridge	Polyurethane: 990162002
Seal kit - Cartridge	Viton: 990162006

CONFIGURATION OPTIONS
Model Code Example: CXADXAV

CONTROL	(X) NOMINAL CONTROL PRESSURE (A)	SEAL MATERIAL (V)	(V) MATERIAL/COATING
X Not Adjustable	A 4 psi (0,3 bar) C 30 psi (2 bar) D 50 psi (3,5 bar) E 75 psi (5 bar) Z 1 psi (0,07 bar)	V Viton N Buna-N E EPDM	Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel