




Reducing/Relieving, On B, Tank to A





Counterbalance, On B, Pilot from A



Pilot Operated Check, On B Pilot from A



Reducing, On B, Drained to A

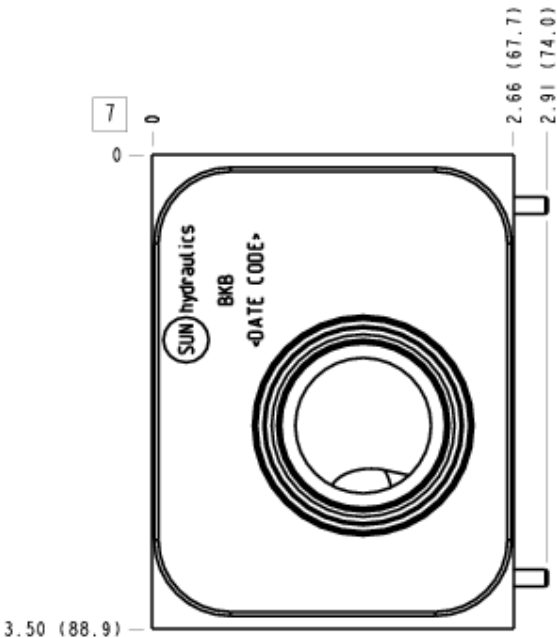

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 07
Body Features	On B, port 3 to A
Stack Height	70 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-17A
Model Weight	1.88 kg.

- NOTES**
- Stack height value in technical data table includes seal retainer plate.
 - Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-111	O-Ring	2
500-001-118	O-Ring	4
700-006	Seal Plate	1
811-001-006	Pin	2
A330-006-006	SAE Plug	1

CONFIGURATION OPTIONS

Model Code Example: BKB

MODIFIER


- 6061-T651 Aluminum, Buna-N
- /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /V 6061-T651 Aluminum, Viton
- /16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- /Y 65-45-12 Ductile Iron, Viton, Dewatering Oil
- /Y4 65-45-12 Ductile Iron, Viton, Chem. Black
- /Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 5

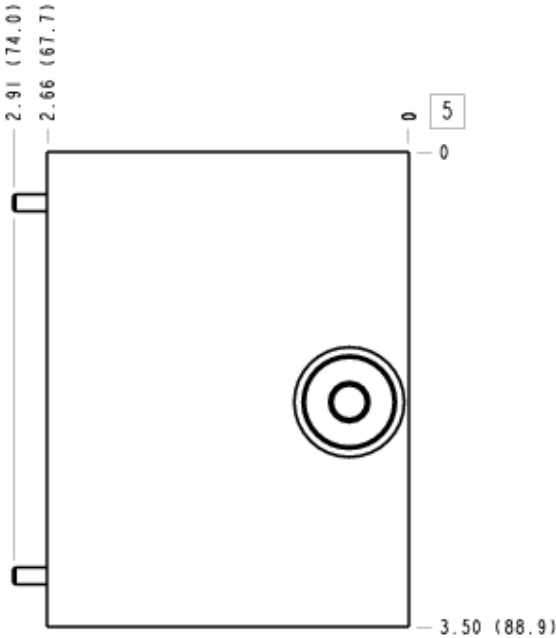


Face 6

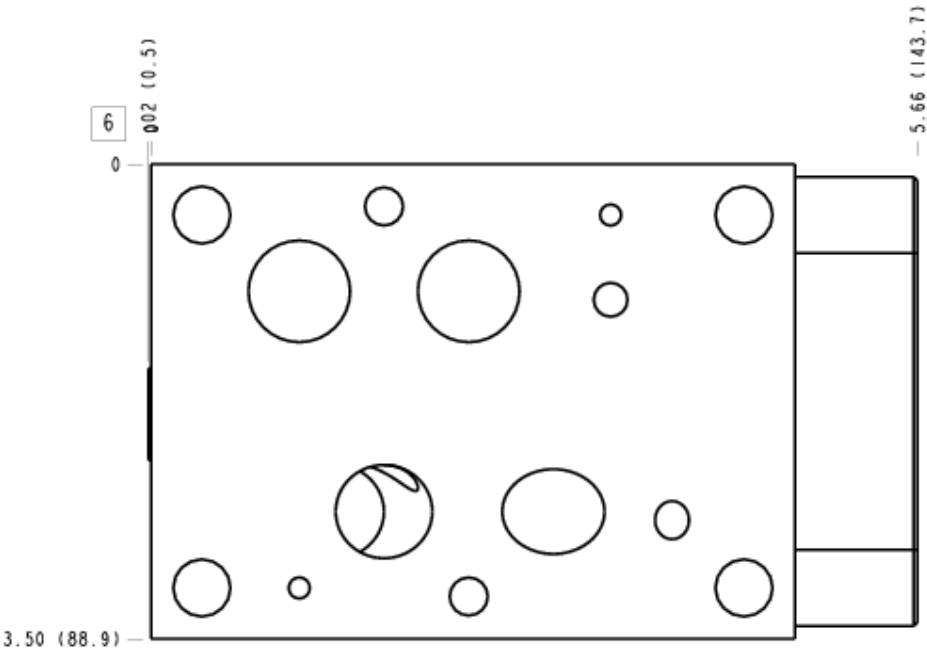

Face 7

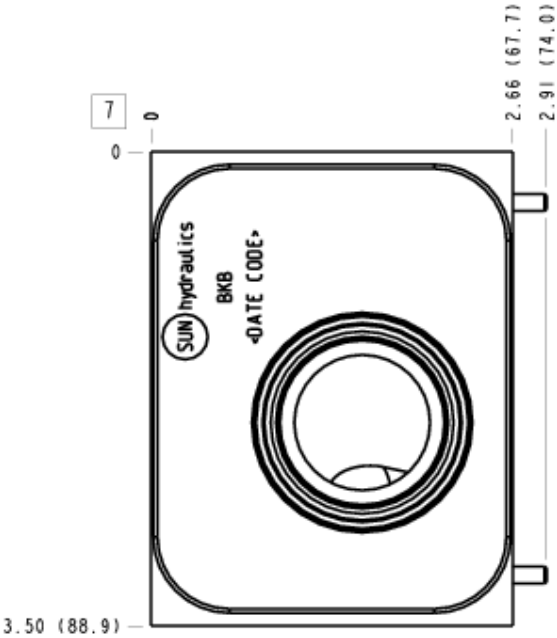

Face 8

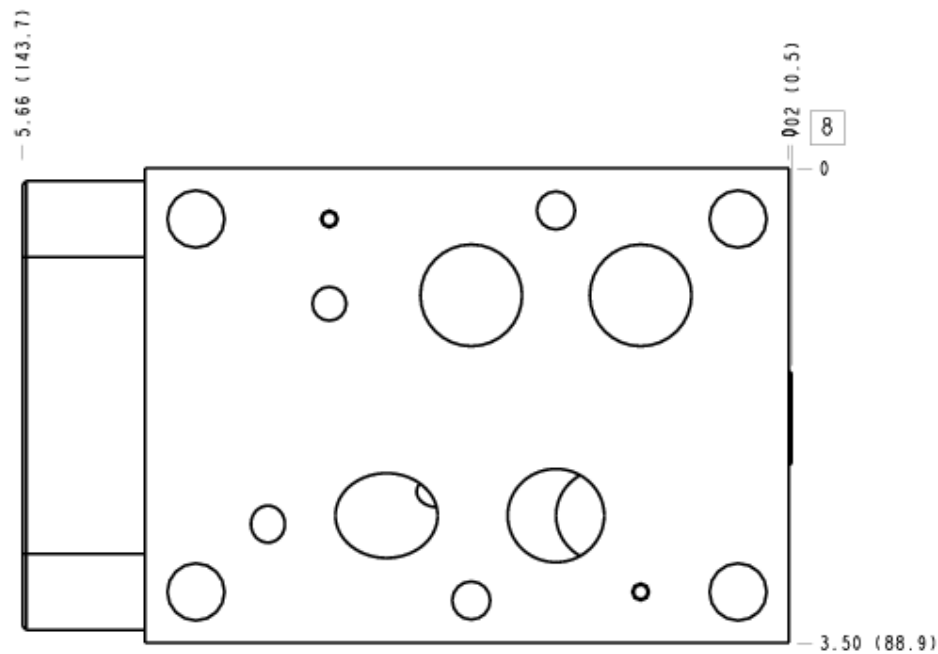

Face 10

