


**CONFIGURATION**

<b>B</b>	Control	External 1/4 BSPP Port
<b>X</b>	Adjustment Range	-
<b>N</b>	Seal Material	Buna-N
<b>(none)</b> Material/Coating		

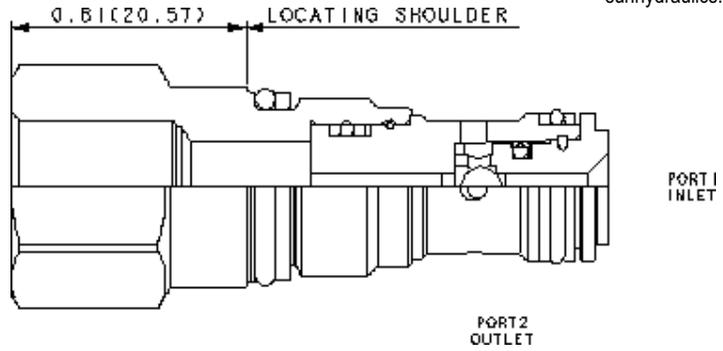

The single ball shuttle connects the higher of two work ports to the signal or common port. It features an external load port located in the hex-end of the cartridge and the signal is sensed at port 2.

**TECHNICAL DATA**

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Seal kit - Cartridge	Buna: 990162007
Seal kit - Cartridge	Polyurethane: 990162002
Seal kit - Cartridge	Viton: 990162006

**CONFIGURATION OPTIONS**

**Model Code Example: CSAYBXN**

<b>CONTROL</b>	<b>(B) ADJUSTMENT RANGE</b>	<b>(X) SEAL MATERIAL</b>	<b>(N) MATERIAL/COATING</b>
<b>B</b> External 1/4 BSPP Port E External 4-SAE Port	<b>X</b> -	<b>N</b> Buna-N V Viton	Standard Material/Coating /AP Stainless Steel, Passivated