

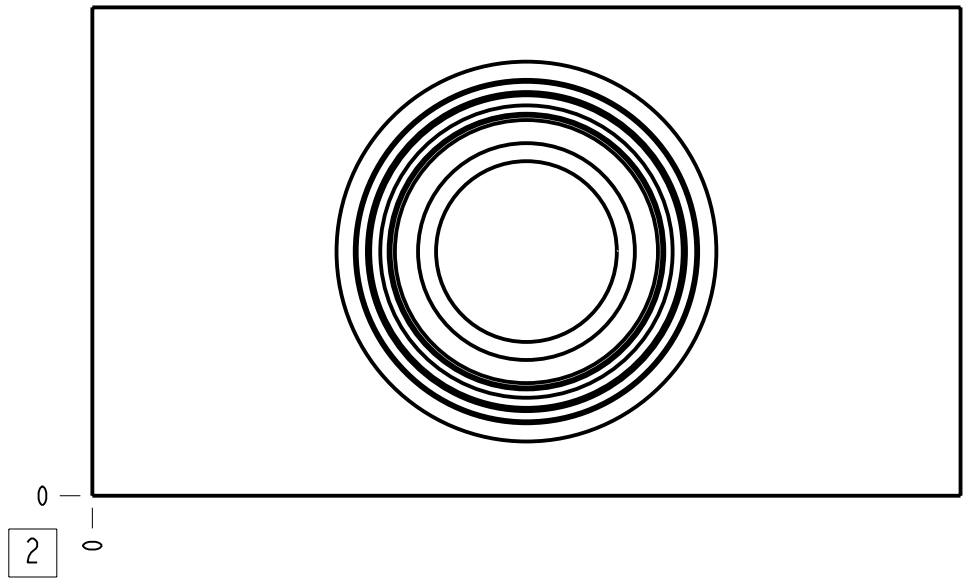


Figure 1 is a schematic diagram of a circular cross-section of a fiber. The diagram shows a central core with a radius of 1.13, surrounded by a cladding with a radius of 2.13. The total radius of the fiber is 4.25. The diagram is labeled with dimensions and a scale bar.

Technical drawing of a rectangular plate with a central hole. The plate has a width of 2.25 and a height of 4.25. The hole has an outer diameter of 1.13 and an inner diameter of 3.44. A dimension line indicates a distance of 0 from the bottom edge to the center of the hole.

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
HCY/S	Ports 1 & 2	1 1/4" BSPP
HCY/S	Port 3	1/4" BSPP

I	150-651-009		DUCTILE IRON	BODY		
ITEM	PART NO.	SETTING	MATERIAL	PART NAME		
MODEL HCY/S			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		 	
DESCRIPTION T-17A Line mount Ninety degree			DATE Aug-16-24	SCALE 1:130	DWG SIZE C	SHEET 1
						