
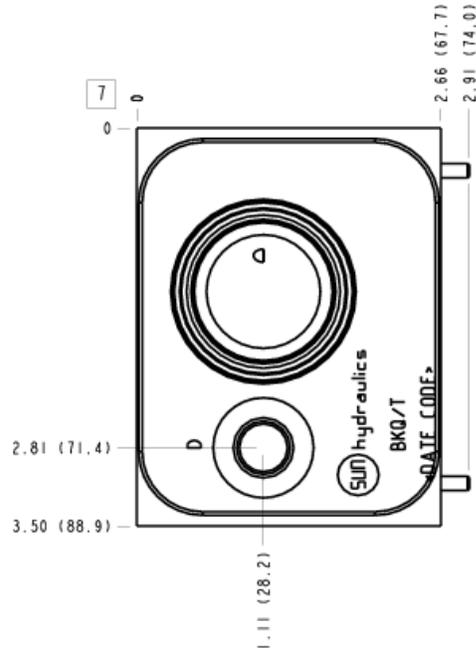


Reducing, On P, Drained Externally



## CONFIGURATION

**T** Modifier 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil

## TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 07
Body Features	On P, port 3 external
Stack Height	70 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-17A
Port Size	1/4" NPTF
Model Weight	4.66 kg.

## NOTES

- Stack height value in technical data table includes seal retainer plate.
- Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## PORT DESIGNATORS

Modifiers	Ports
BKQ, /10, /11, /15, /16, /V	Gage Port (Plugged): 1/4" NPTF; Drain Port: SAE 6;
BKQ/1A, /1B, /1F, /1G, /M, /Z	Gage Port (Plugged): 1/4" BSPP; Drain Port: 1/4" BSPP;

## INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	1
500-001-111	O-Ring	2
500-001-118	O-Ring	4
700-006	Seal Plate	1
811-001-006	Pin	2

## CONFIGURATION OPTIONS

Model Code Example: BKQ/T


MODIFIER	(T)
<b>/T</b>	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil 6061-T651 Aluminum, Buna-N
<b>/11</b>	6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
<b>/10</b>	6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
<b>/V</b>	6061-T651 Aluminum, Viton
<b>/16</b>	6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
<b>/15</b>	6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
<b>/M</b>	6061-T651 Aluminum, Metric, Buna-N
<b>/1B</b>	6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
<b>/1A</b>	6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
<b>/Z</b>	6061-T651 Aluminum, Metric, Viton
<b>/1G</b>	6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
<b>/1F</b>	6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
<b>/S</b>	65-45-12 Ductile Iron, Buna-N, Dewatering Oil
<b>/S4</b>	65-45-12 Ductile Iron, Buna-N, Chem. Black
<b>/S3</b>	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
<b>/Y</b>	65-45-12 Ductile Iron, Viton, Dewatering Oil
<b>/Y4</b>	65-45-12 Ductile Iron, Viton, Chem. Black
<b>/Y3</b>	65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
<b>/T4</b>	65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
<b>/T3</b>	65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
<b>/W</b>	65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil
<b>/W4</b>	65-45-12 Ductile Iron, Metric, Viton, Chem. Black
<b>/W3</b>	65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer

## MANIFOLD FACES


### FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 5

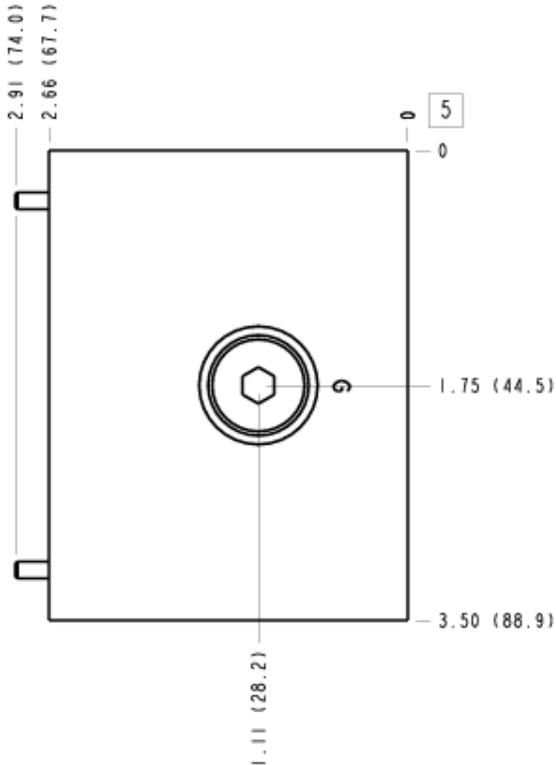

Face 6

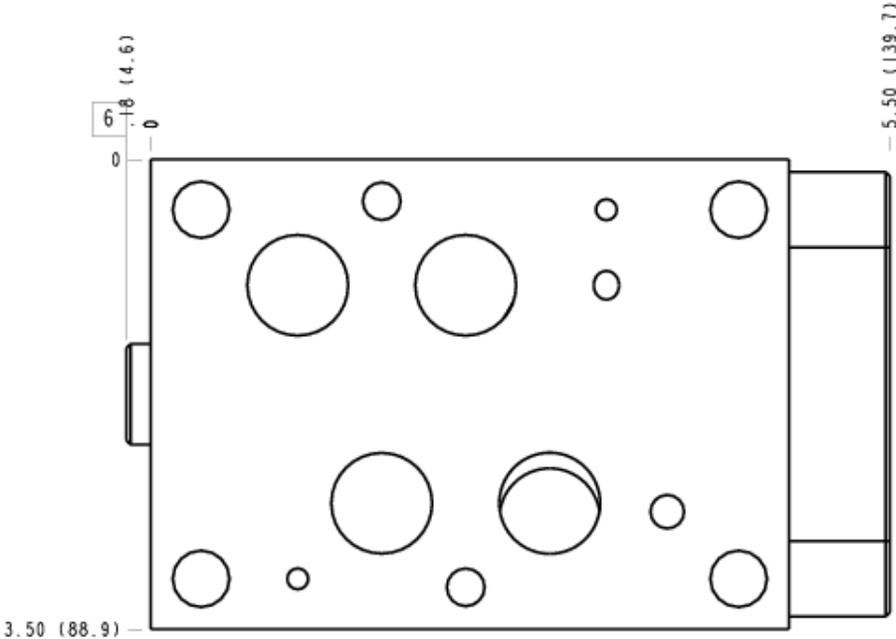

### Face 7

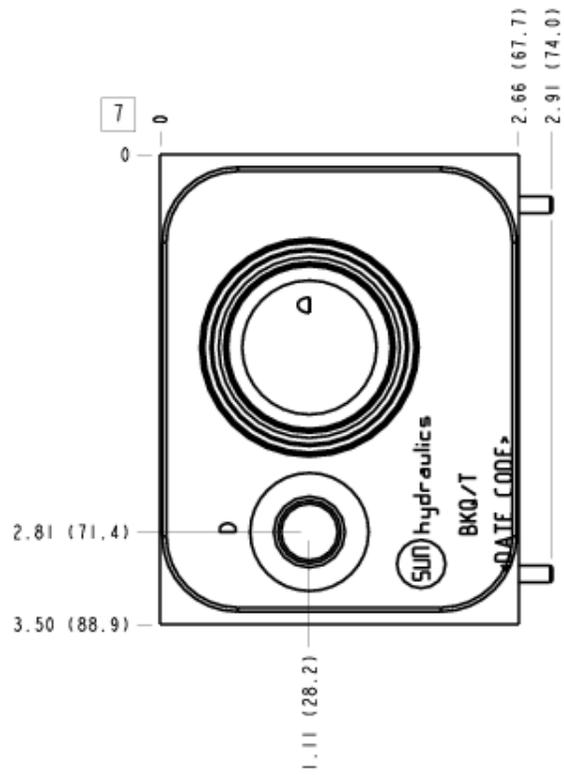

### Face 8

