


**CONFIGURATION**

<b>X</b>	Control	Not Adjustable
<b>C</b>	Nominal Control Pressure	30 psi (2 bar)
<b>N</b>	Seal Material	Buna-N
<b>(none)</b> Material/Coating		

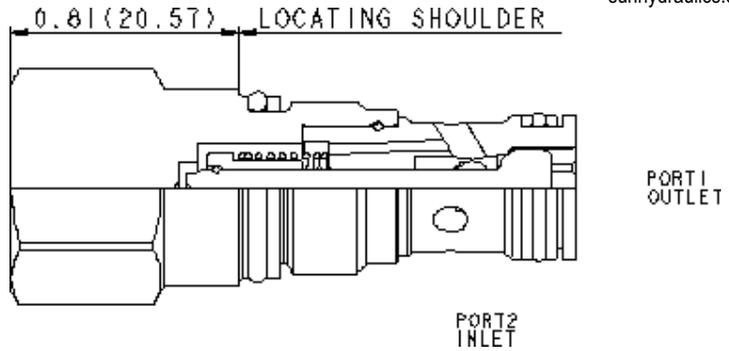

Free-flow, side-to-nose check valves are on/off circuit components that allow free flow from the inlet (port 2) to the outlet (port 1) and block flow in the opposite direction.

**TECHNICAL DATA**

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990162007
Seal kit - Cartridge	EPDM: 990162014
Seal kit - Cartridge	Polyurethane: 990162002
Seal kit - Cartridge	Viton: 990162006

**CONFIGURATION OPTIONS**

Model Code Example: **CXADXCN**

CONTROL	(X) NOMINAL CONTROL PRESSURE	(C) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>C</b> 30 psi (2 bar)	<b>N</b> Buna-N	Standard Material/Coating
	<b>A</b> 4 psi (0,3 bar)	<b>E</b> EPDM	<b>/AP</b> Stainless Steel, Passivated
	<b>D</b> 50 psi (3,5 bar)	<b>V</b> Viton	<b>/LH</b> Mild Steel, Zinc-Nickel
	<b>E</b> 75 psi (5 bar)		
	<b>Z</b> 1 psi (0,07 bar)		