


CONFIGURATION

| | | |
|---------------|-------------------|----------------|
| X | Control | Not Adjustable |
| B | Cracking Pressure | 15 psi (1 bar) |
| N | Seal Material | Buna-N |
| (none) | Material/Coating | |

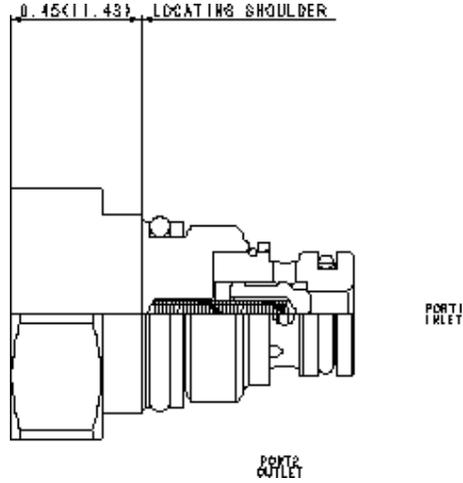

Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|----------------------|------------------|
| Seal kit - Cartridge | Buna: 990608007 |
| Seal kit - Cartridge | EPDM: 990608014 |
| Seal kit - Cartridge | Viton: 990608006 |

CONFIGURATION OPTIONS

Model Code Example: **CXAAXBN**

| CONTROL | (X) CRACKING PRESSURE | (B) SEAL MATERIAL | (N) MATERIAL/COATING |
|-------------------------|--|--------------------------------------|---|
| X Not Adjustable | B 15 psi (1 bar) F 100 psi (7 bar) Z 1 psi (0,07 bar) | N Buna-N E EPDM V Viton | Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel |