


CONFIGURATION

/S3 Modifier 65-45-12 Ductile Iron, Buna-N,
Trivalent Clear Zinc with Top
Sealer

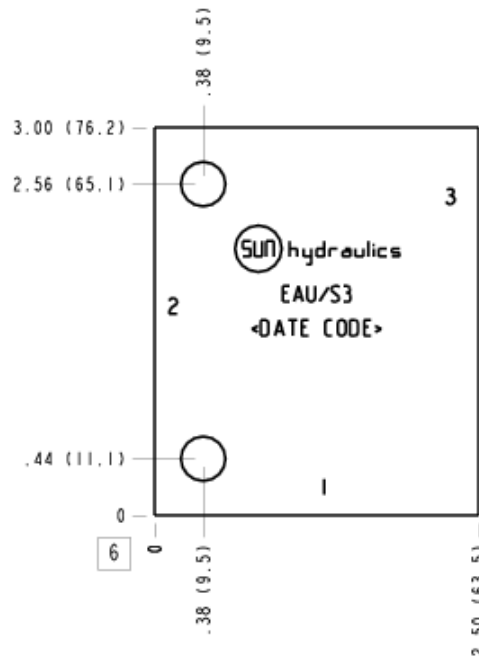

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Ninety degree with high capacity port 3
Mounting Hole Diameter	8.6 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
EAU, /10, /11, /S, /S3	All Ports: 3/8" BSPP;

CONFIGURATION OPTIONS

Model Code Example: EAU/S3

MODIFIER (/S3)

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent
Clear Zinc with Top Sealer

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black
Anodize - Per MIL SPEC 8625F Type II, Class
II

/11 6061-T651 Aluminum, Buna-N, Clear
Anodize - Per MIL SPEC 8625F Type II, Class
I

/S 65-45-12 Ductile Iron, Buna-N, Dewatering
Oil

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless

Nickel