


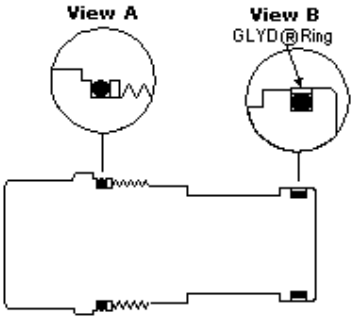

- NOTES**
- Install back-up rings and O-rings as shown in views.
 - When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
 - After installing the GLYD® Ring, size it to restore original shape and to prevent damage during cartridge installation.
 - When installing cartridge - be sure to torque to recommended value.
 - GLYD® Ring is a registered trademark of W. S. Shamban and Co., Los Angeles, CA, USA

INCLUDED COMPONENTS

Part	Description	Quantity	View
500-001-126	O-Ring	1	B
500-002-131	O-Ring	1	A
515-002-131	Backup Ring	1	A
530-102-127	Glyd Ring	1	B

USED WITH

RDJA RPKS RPKS8 RPKT