
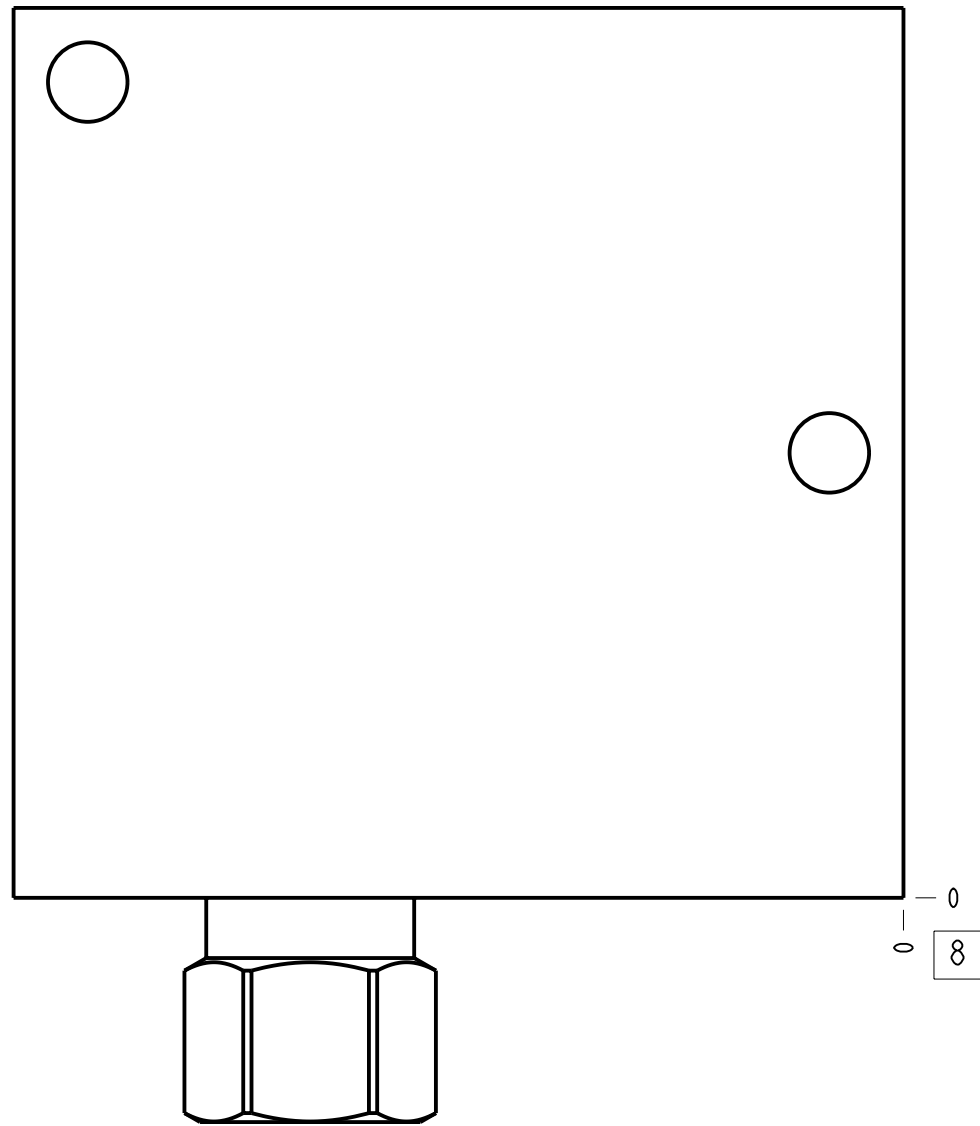
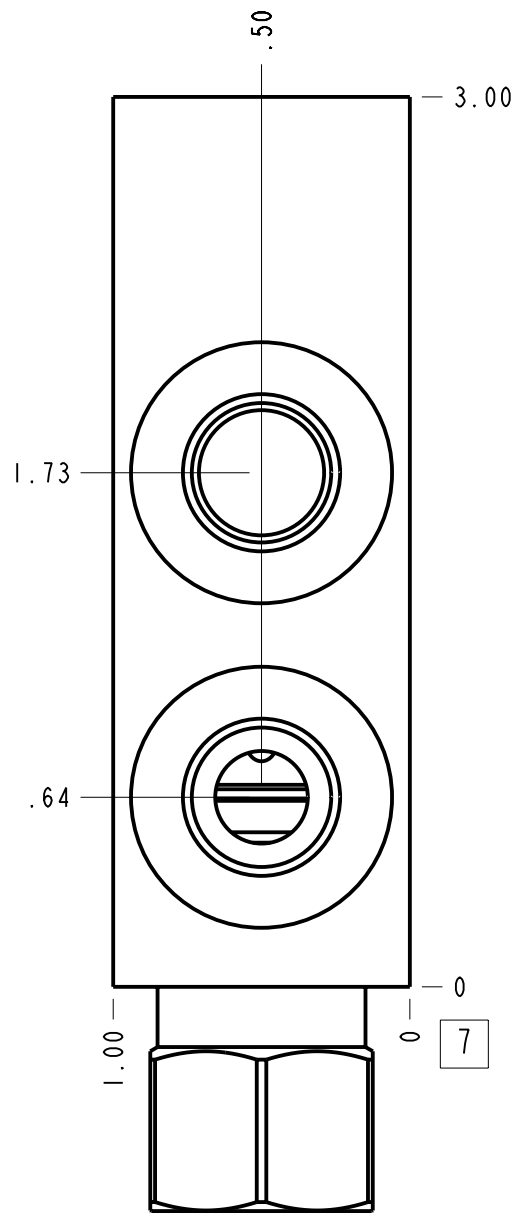
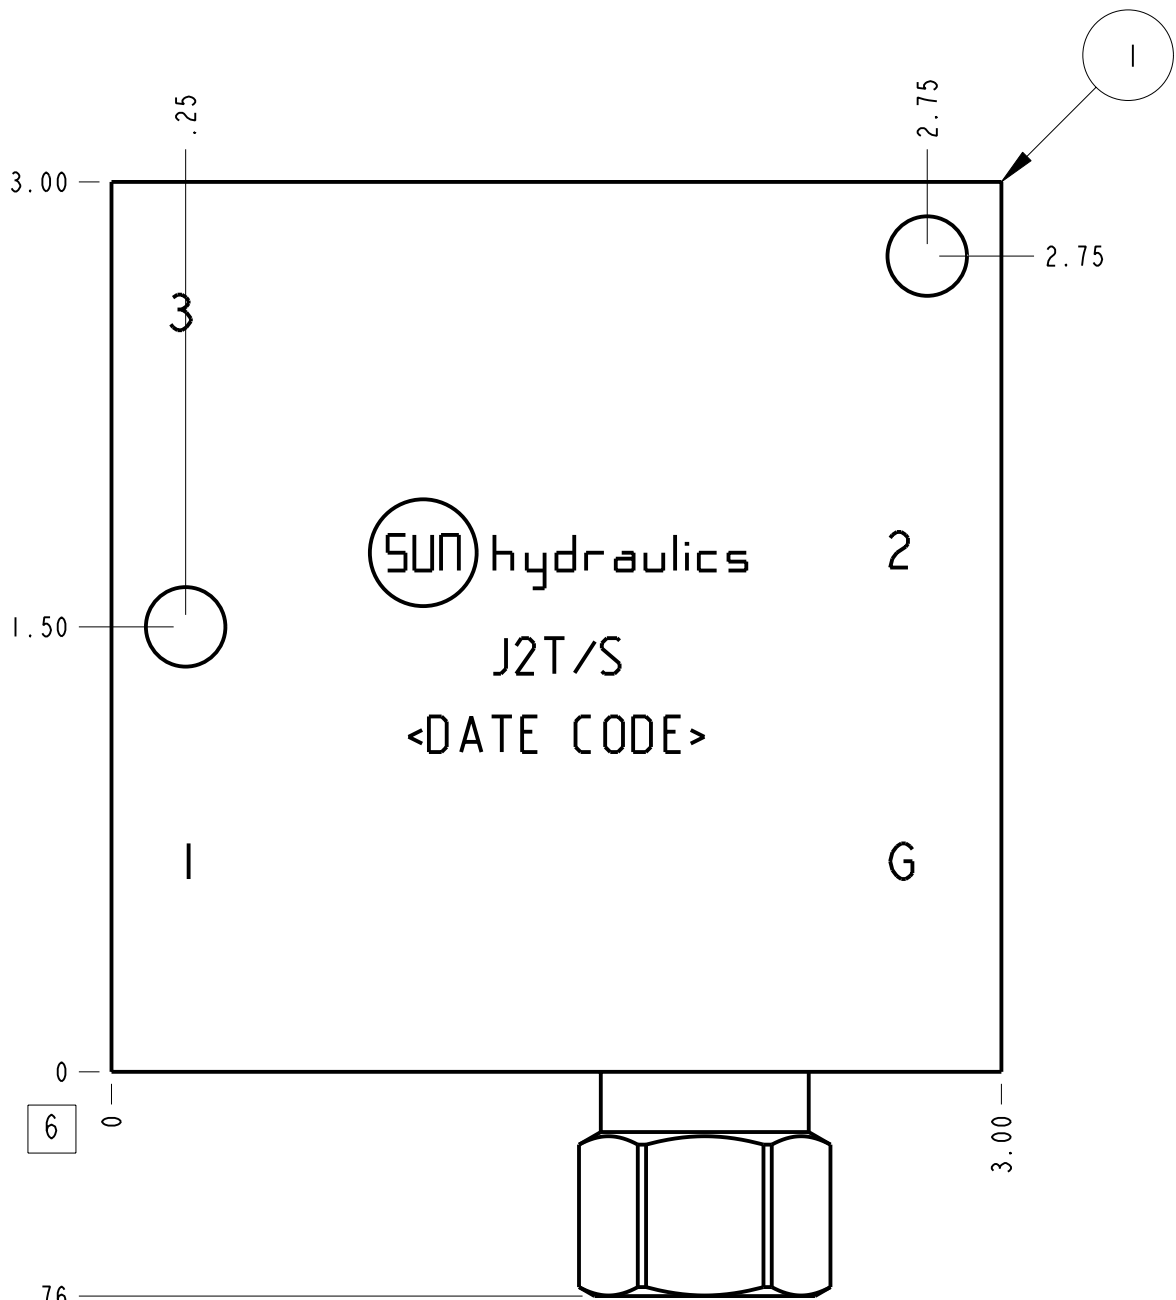
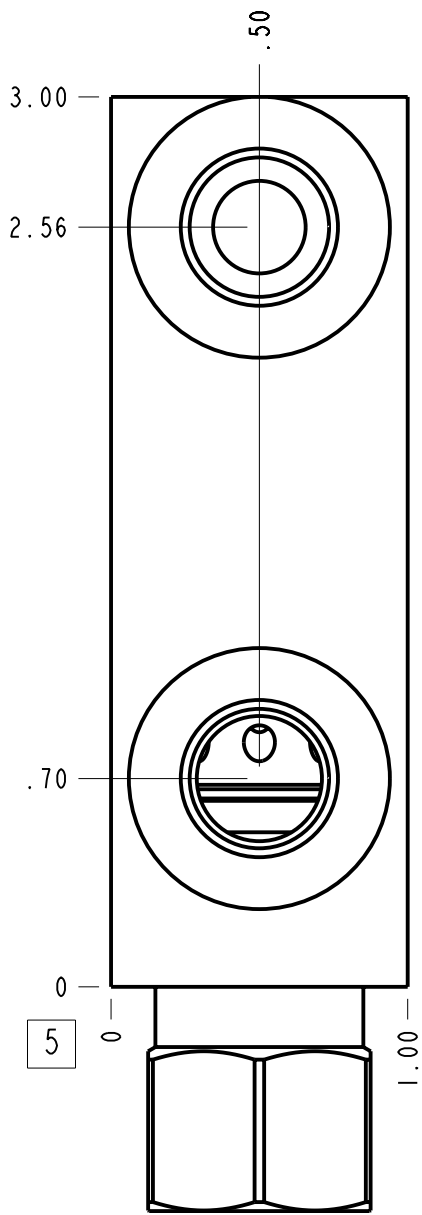
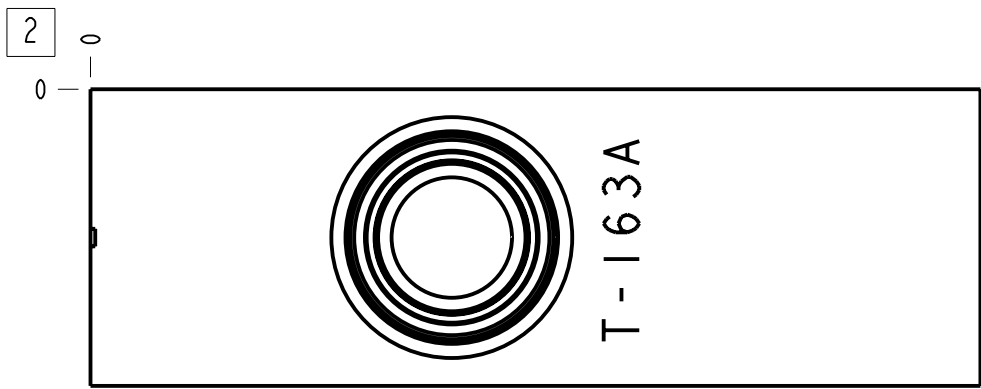





Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
J2T/S	Ports 1 & 2	1/4" BSPP
J2T/S	Port 3	1/4" BSPP
J2T/S	Gage Port	1/4" BSPP

Technical Data	U.S. Units	Metric Units
Cavity	T-163A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	1.994 lb.	0,905 kg.
Mounting Hole Diameter	.27 in.	8,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

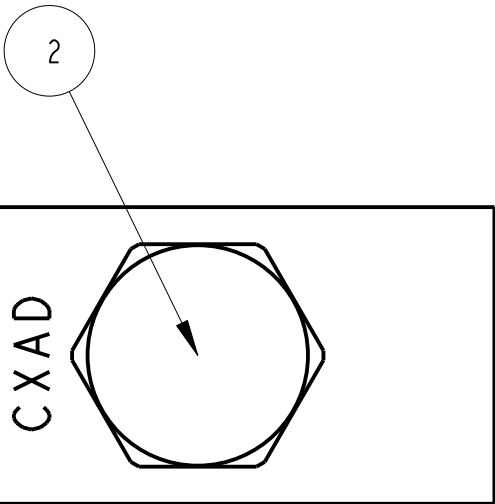

2	CXAD-XCN			CHECK VALVE	
1	158-481-005		DUCTILE IRON	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE  THIRD ANGLE 
DESCRIPTION			DATE	SCALE	DWG SIZE
T-163A Line mount (See Technical Data for Body Features)			Sep-13-24	1.545	C
			SHEET	1	
					