


CONFIGURATION

(none) Modifier 6061-T651 Aluminum, Buna-N

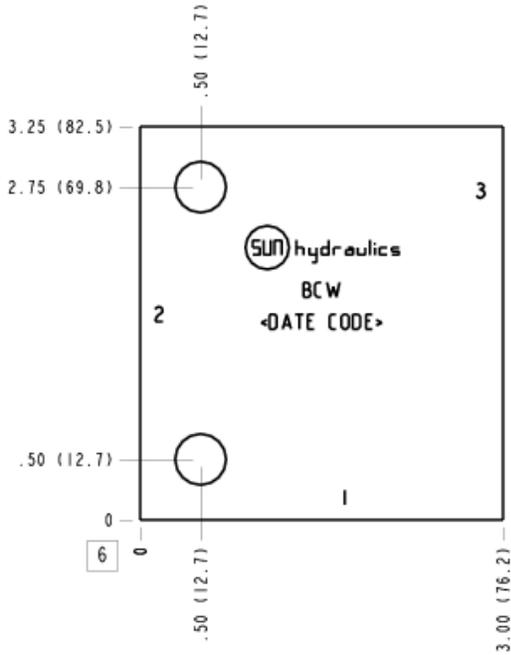

TECHNICAL DATA

| | |
|------------------------|---------------|
| Body Type | Line mount |
| Interface | None |
| Body Features | Ninety degree |
| Mounting Hole Diameter | 10,7 mm |
| Mounting Hole Depth | Through |
| Mounting Hole Quantity | 2 |
| Open Cavities | 1 |
| Cavity | T-2A |
| Port Size | 3/4" BSPP |
| Model Weight | 0.48 kg. |

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers | Ports |
|---------------------------------|--|
| BCW, /10, /11, /A, /S, /S3, /S4 | Ports 1 & 2: 3/4" BSPP; Port 3: 1/4" BSPP; |

CONFIGURATION OPTIONS

Model Code Example: BCW

MODIFIER


- 6061-T651 Aluminum, Buna-N**
- /11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- /A** 316 Stainless Steel, Buna-N

MANIFOLD FACES


FACE GRID

| | | | |
|---|----|----|----|
| 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 |


Face 2

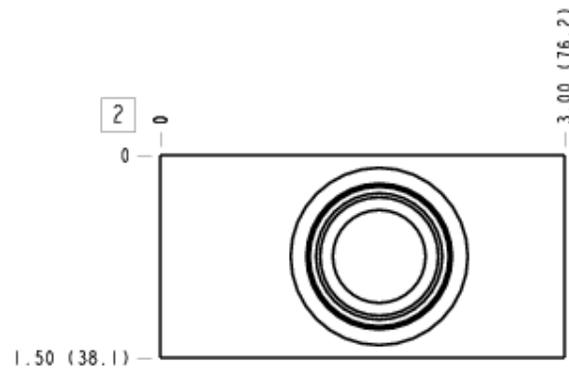


Face 5

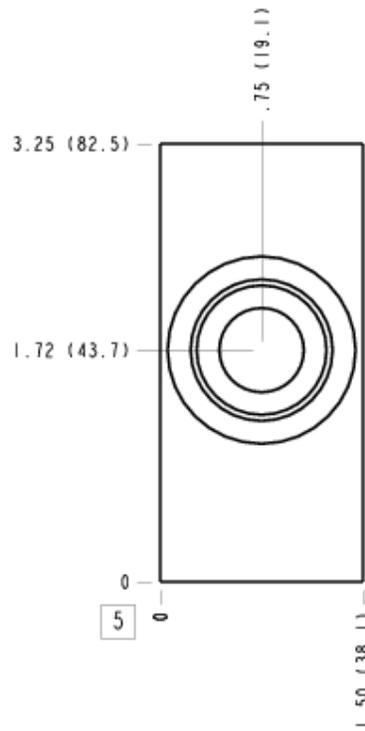


Face 6

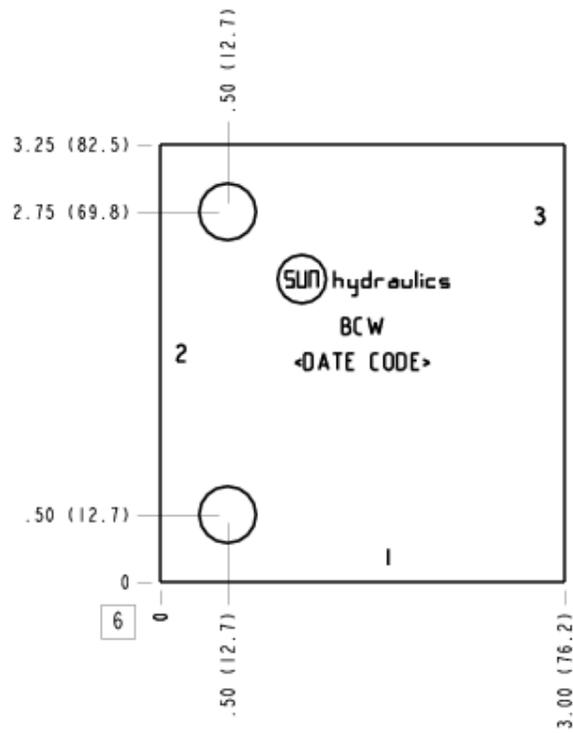

Face 7

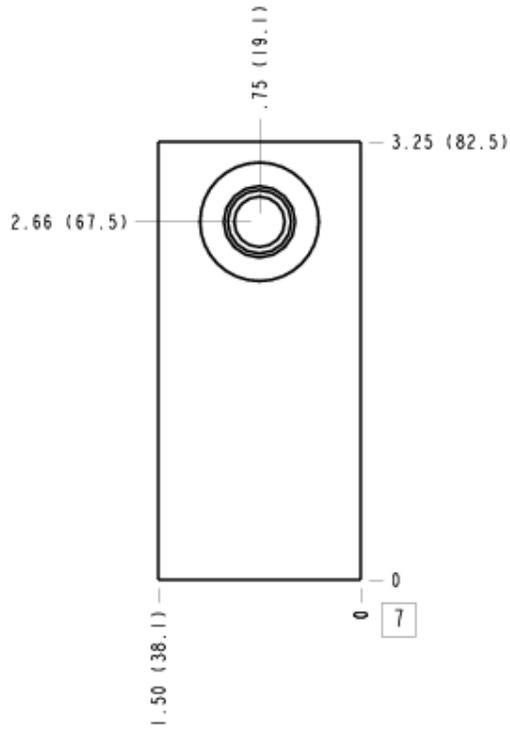

Face 8

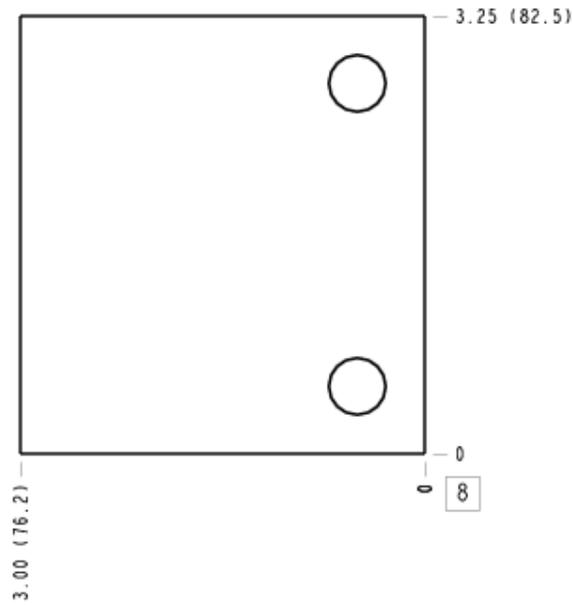

Face 10

