


**CONFIGURATION**

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

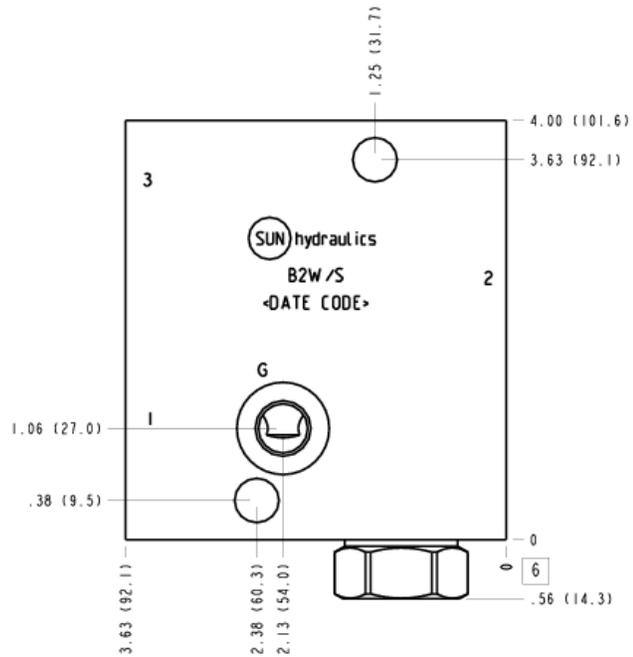

**TECHNICAL DATA**

Body Type	Line mount
Interface	None
Body Features	Ninety degree with reverse flow check - reducing
Includes integral cartridge(s)	Yes (see Included Components)
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-2A
Port Size	3/4" BSPP
Model Weight	1.99 kg.

**NOTES**

**Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## PORT DESIGNATORS

Modifiers	Ports
B2W, /10, /11, /15, /16, /V	Ports 1 & 2: 3/4" BSPP; Port 3: 1/4" BSPP; Gage Port: 1/4" BSPP;

## INCLUDED COMPONENTS

Part	Description	Quantity
CXEDXCN	Cartridge	1

## CONFIGURATION OPTIONS

Model Code Example: B2W/S

### MODIFIER (S)


- /S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil  
6061-T651 Aluminum, Buna-N
- /11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /V** 6061-T651 Aluminum, Viton
- /16** 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /15** 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- /V** 65-45-12 Ductile Iron, Viton, Dewatering Oil
- /Y4** 65-45-12 Ductile Iron, Viton, Chem. Black
- /Y3** 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

## MANIFOLD FACES


### FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


### Face 2

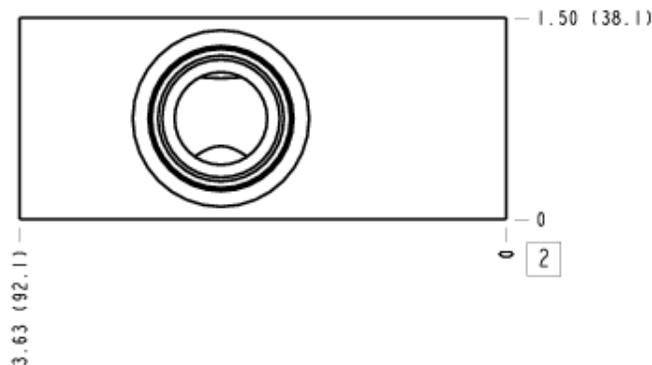


### Face 5

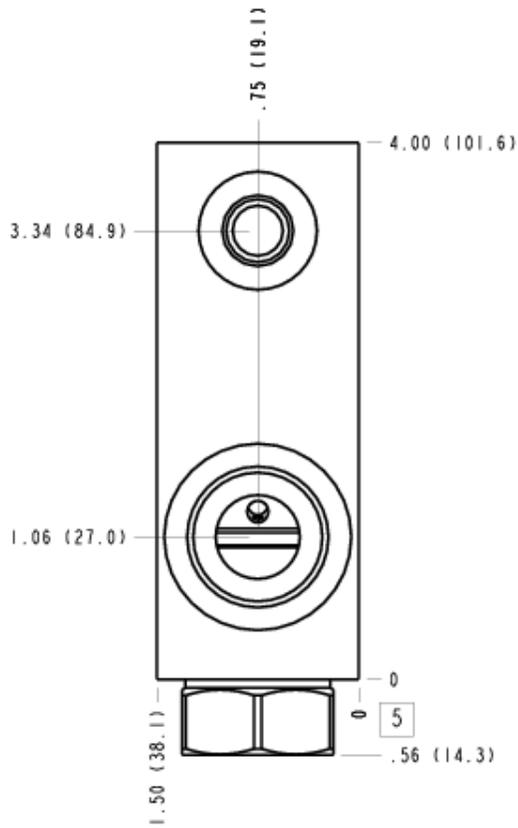

### Face 6

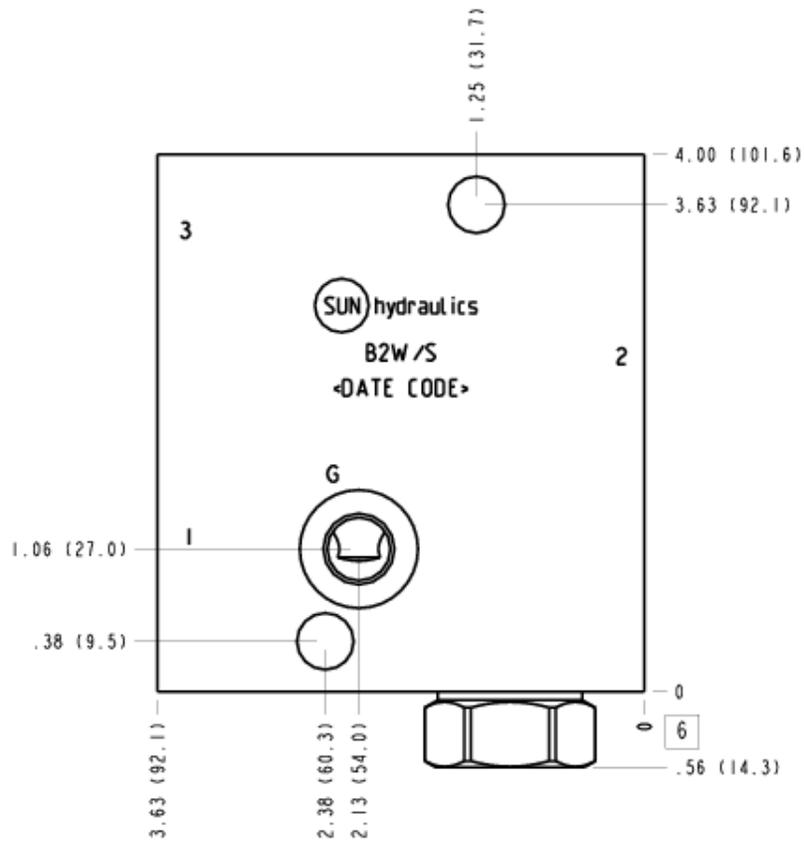

### Face 7

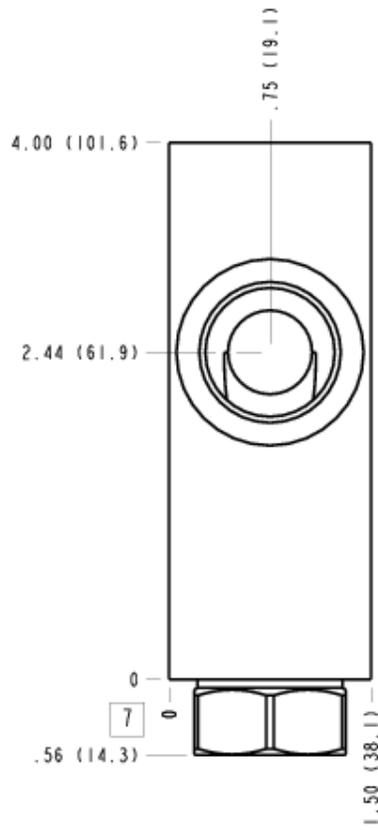

### Face 10

