


CONFIGURATION

X	Control	Not Adjustable
X	Adjustment Range	-
N	Seal Material	Buna-N

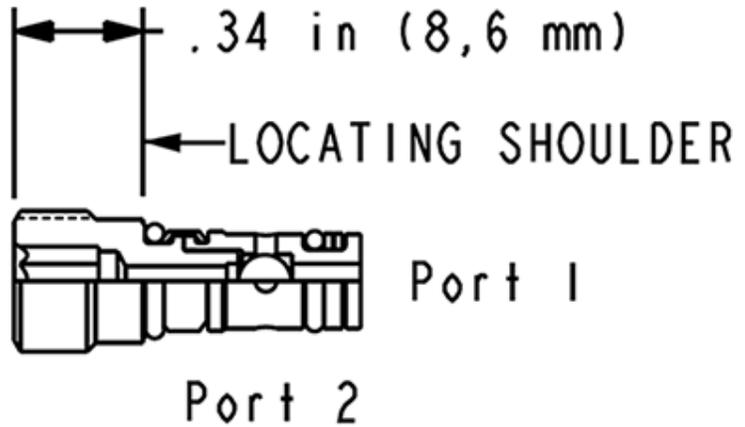

The single ball shuttle connects the higher of two work ports to the signal or common port. The signal is sensed at port 2.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Valve Internal Hex Size	4 mm
Seal kit - Cartridge	Buna: 990382007
Seal kit - Cartridge	Viton: 990382006

CONFIGURATION OPTIONS

Model Code Example: CSZNXXN

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)
X Not Adjustable		X -		N Buna-N	
				V Viton	