


CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

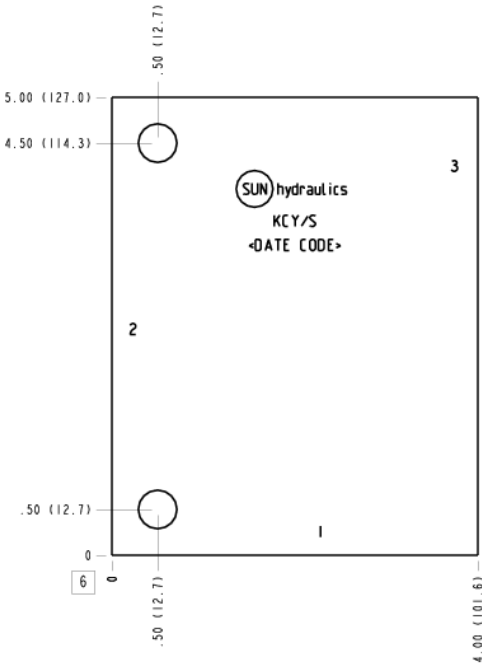

TECHNICAL DATA

|                        |               |
|------------------------|---------------|
| Body Type              | Line mount    |
| Interface              | None          |
| Body Features          | Ninety degree |
| Mounting Hole Diameter | 10,7 mm       |
| Mounting Hole Depth    | Through       |
| Mounting Hole Quantity | 2             |

**NOTES** *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers     | Ports                                        |
|---------------|----------------------------------------------|
| KCY, /10, /11 | Ports 1 & 2: 1 1/4" BSPP; Port 3: 1/4" BSPP; |

CONFIGURATION OPTIONS  
Model Code Example: **KCY/S**

| MODIFIER                                                                             | (/S) |
|--------------------------------------------------------------------------------------|------|
| /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil                                     |      |
| 6061-T651 Aluminum, Buna-N                                                           |      |
| /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I  |      |
| /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II |      |
| /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black                                       |      |
| /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer              |      |