

### TECHNICAL DATA

|                        |               |
|------------------------|---------------|
| Body Type              | Line mount    |
| Interface              | None          |
| Body Features          | Ninety degree |
| Mounting Hole Diameter | 8.6 mm        |
| Mounting Hole Depth    | Through       |
| Mounting Hole Quantity | 1             |
| Open Cavities          | 1             |
| Cavity                 | T-13A         |
| Port Size              | 3/8" BSPP     |
| Model Weight           | 0.15 kg.      |

**NOTES** *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

### PORT DESIGNATORS

| Modifiers              | Ports                 |
|------------------------|-----------------------|
| GAU, /10, /11, /S, /S3 | All Ports: 3/8" BSPP; |

### CONFIGURATION OPTIONS

**Model Code Example: GAU**

#### MODIFIER

- 6061-T651 Aluminum, Buna-N**
- /11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


### MANIFOLD FACES

#### FACE GRID




|   |    |    |    |
|---|----|----|----|
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |


### Face 2

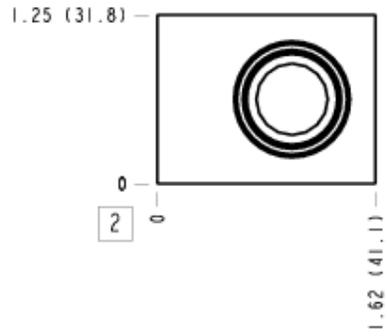


### Face 5

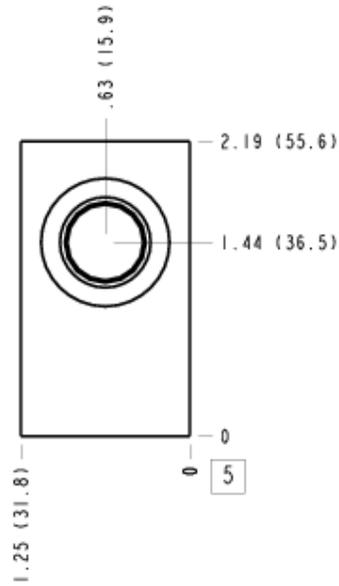


### Face 6

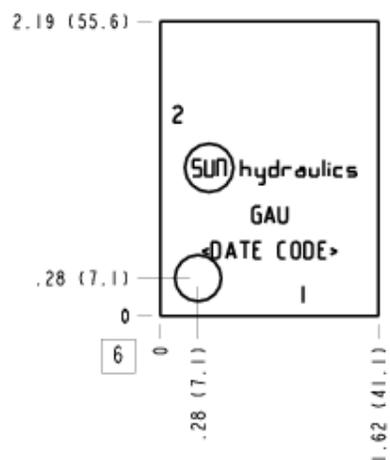

### Face 7

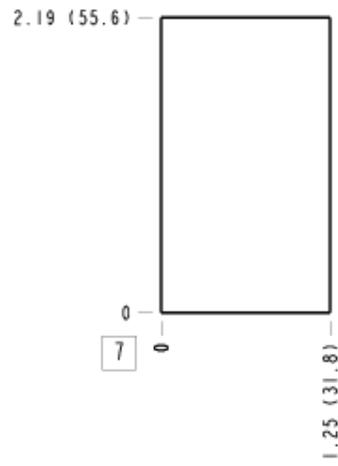

### Face 8

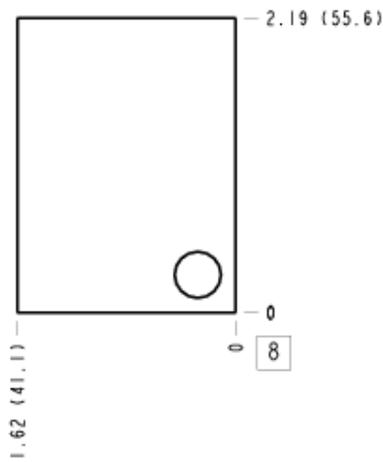

### Face 10

