


AC COIL

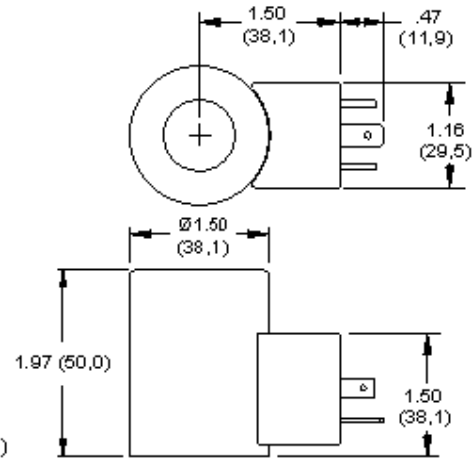

in (mm)

### TECHNICAL DATA

|   |  |
|---|--|
| Maximum Coil Temperature at 68°F (20°C) Ambient | 218°F (105°C)  |
| Arc Suppression (TVS)                           | Included   |
| Power Consumption (cold) - at rated voltage     | 22 watts   |
| Maximum Ambient Temperature                     | 50 °C  |
| Voltage/Frequency                               | 115 VAC 50/60 Hz   |
| Operating Voltage Range                         | +/- 10% nominal  |
| Duty Cycle Rating                               | 100 %  |
| Connector                                       | ISO4400 - EN/DIN175301-803, Form A (ISO/DIN 43650) 3-pin |
| Connector Environment Rating                    | IP65/IP67  |
| Coil Nut Torque                                 | 0,5 Nm   |

### USED WITH

|      |       |      |       |       |      |       |       |       |       |
|------|-------|------|-------|-------|------|-------|-------|-------|-------|
| DAAL | DAALS | DBAL | DBALS | DFCA  | DFCB | DFDA  | DFDB  | DFEA  | DFEB  |
| DFFA | DFFB  | DLDA | DLDAS | DLDAZ | DMDA | DMDAS | DMDAZ | DNCA  | DNCAZ |
| DNDA | DNDAS | DNDC | DNDY  | DNDYS | DTCA | DTCAZ | DTDA  | DTDAS | DWDA  |
| HDDA |       |      |       |       |      |       |       |       |       |