


CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

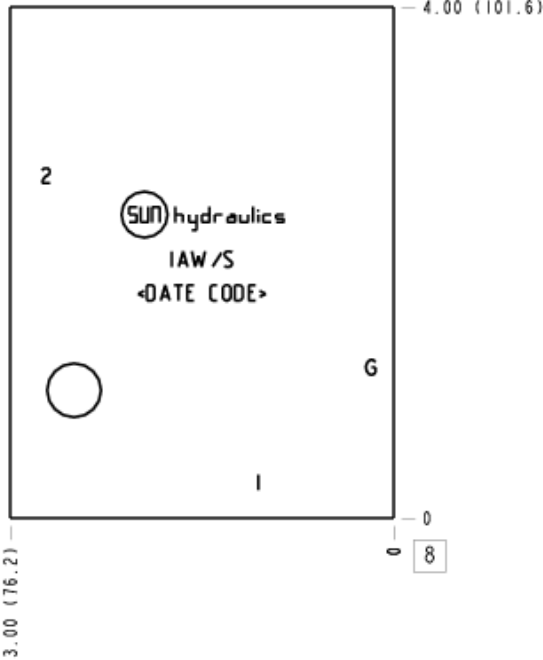

TECHNICAL DATA

|                        |                               |
|------------------------|-------------------------------|
| Body Type              | Line mount                    |
| Interface              | None                          |
| Body Features          | Ninety degree with gauge port |
| Mounting Hole Diameter | 10,4 mm                       |
| Mounting Hole Depth    | Through                       |
| Mounting Hole Quantity | 1                             |

**NOTES** *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers     | Ports                                         |
|---------------|-----------------------------------------------|
| IAW, /10, /11 | Ports 1 & 2: 3/4" BSPP; Gage Port: 1/4" BSPP; |

CONFIGURATION OPTIONS

Model Code Example: IAW/S

| MODIFIER | (/S)                                                                             |
|----------|----------------------------------------------------------------------------------|
| /S       | 65-45-12 Ductile Iron, Buna-N, Dewatering Oil                                    |
|          | 6061-T651 Aluminum, Buna-N                                                       |
| /11      | 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I  |
| /10      | 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II |
| /S4      | 65-45-12 Ductile Iron, Buna-N, Chem. Black                                       |
| /S3      | 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer              |