

### TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Ninety degree
Mounting Hole Diameter	7,1 mm
Mounting Hole Quantity	1
Open Cavities	1
Cavity	T-162A
Port Size	1/4" BSPP
Model Weight	0.10 kg.

### NOTES

**Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

### PORT DESIGNATORS

Modifiers	Ports
AAT, /10, /11	All Ports: 1/4" BSPP;

### CONFIGURATION OPTIONS


#### Model Code Example: AAT

#### MODIFIER


- 6061-T651 Aluminum, Buna-N**
- /11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

### MANIFOLD FACES


#### FACE GRID

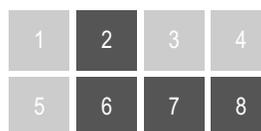


### Face 2

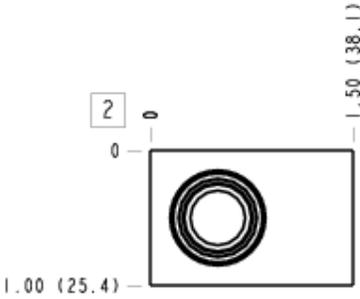


### Face 6

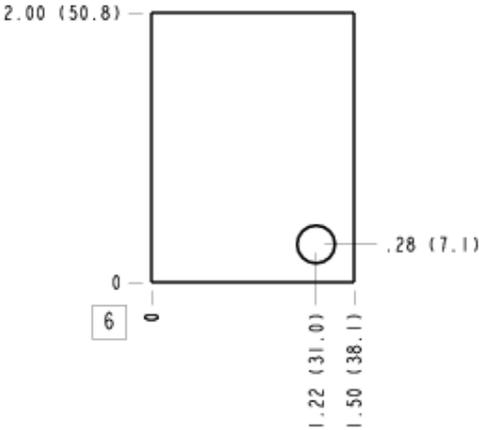

### Face 7

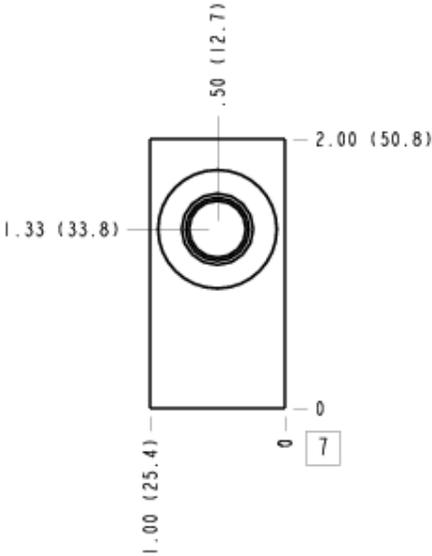

### Face 8

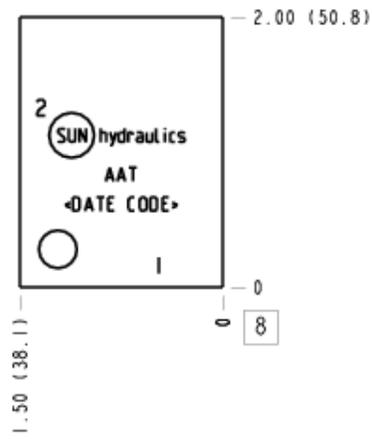

### Face 10

