


CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

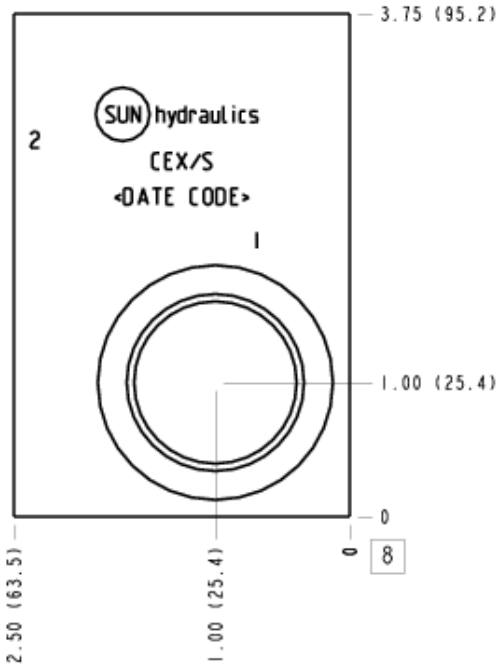

TECHNICAL DATA

|                        |                              |
|------------------------|------------------------------|
| Body Type              | Line mount                   |
| Interface              | None                         |
| Body Features          | Through port with gauge port |
| Mounting Hole Thread   | M6x1.0 - 6H                  |
| Mounting Hole Depth    | 12,7 mm                      |
| Mounting Hole Quantity | 2                            |

**NOTES** *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers     | Ports                                        |
|---------------|----------------------------------------------|
| CEX, /10, /11 | Ports 1 & 2: 1" BSPP; Gage Ports: 1/4" BSPP; |

CONFIGURATION OPTIONS

Model Code Example: CEX/S

| MODIFIER                                                                             | (/S) |
|--------------------------------------------------------------------------------------|------|
| /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil                                     |      |
| 6061-T651 Aluminum, Buna-N                                                           |      |
| /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I  |      |
| /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II |      |
| /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black                                       |      |
| /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer              |      |