


CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

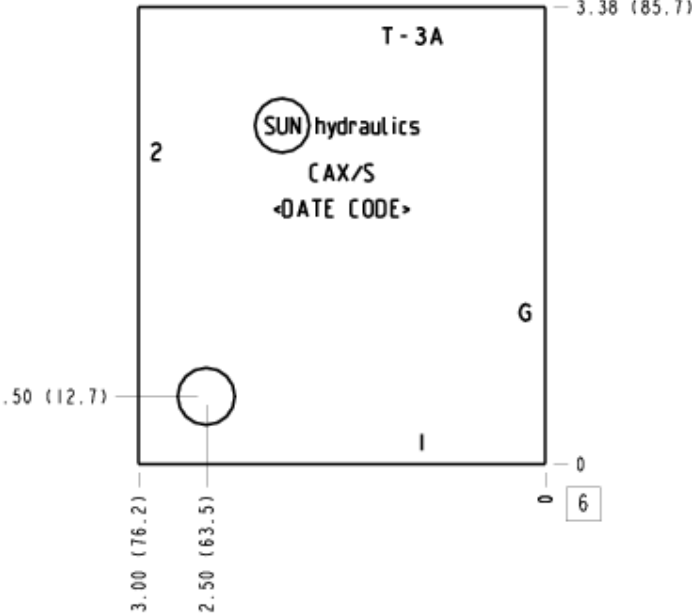

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Ninety degree with gauge port
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	1
Open Cavities	1
Cavity	T-3A
Port Size	1" BSPP
Model Weight	1.78 kg.

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
CAX, /10, /11, /S, /S3	Ports 1 & 2: 1" BSPP; Gage Port: 1/4" BSPP;


CONFIGURATION OPTIONS
Model Code Example: CAX/S

MODIFIER	(/S)
/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil	
6061-T651 Aluminum, Buna-N	
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I	
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II	
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black	
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer	


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

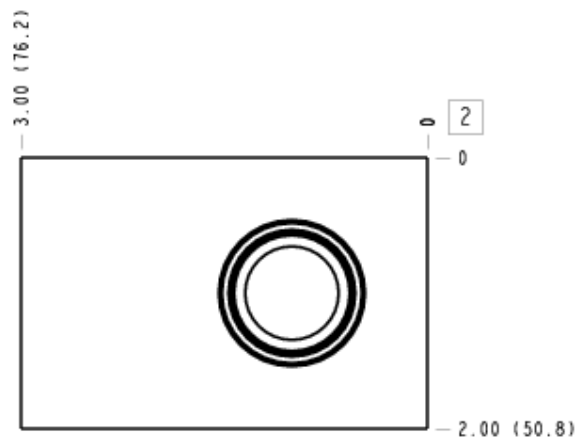


Face 5

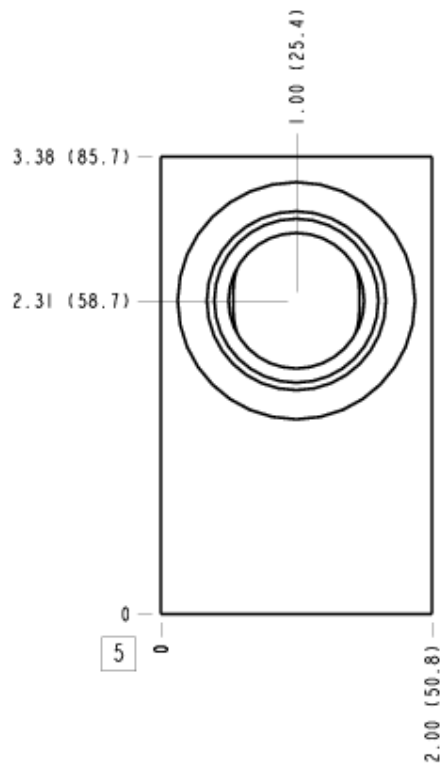

Face 6

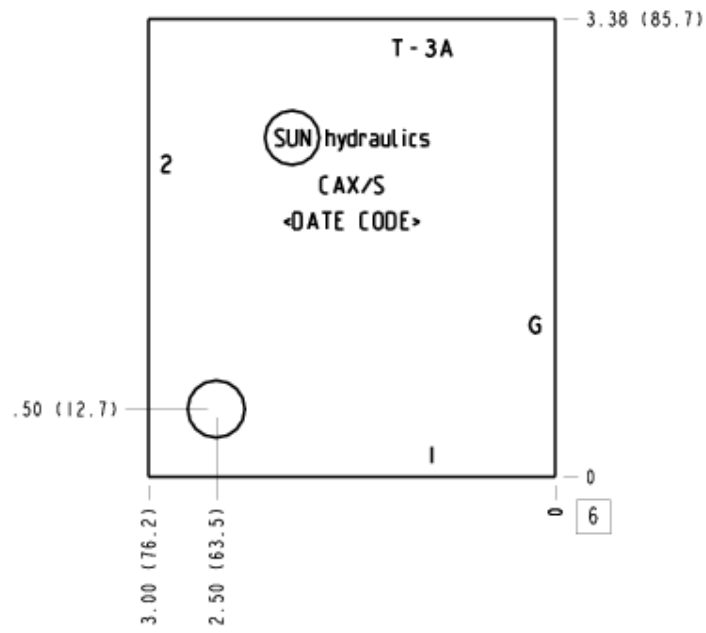

Face 7

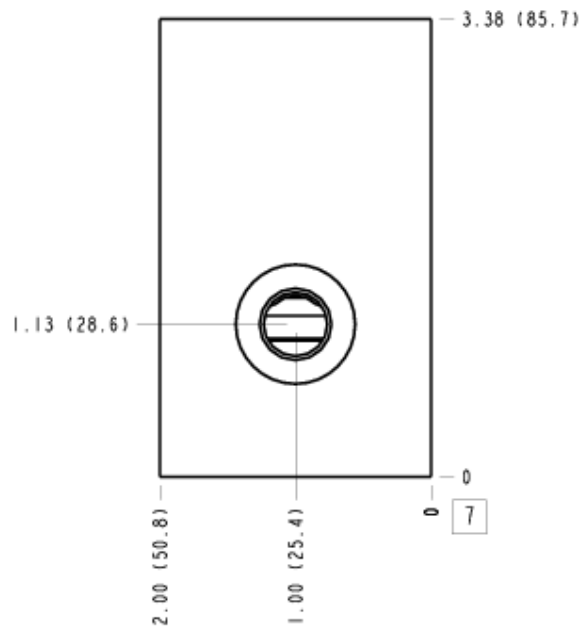

Face 10

