


M-Control, C-Poppet

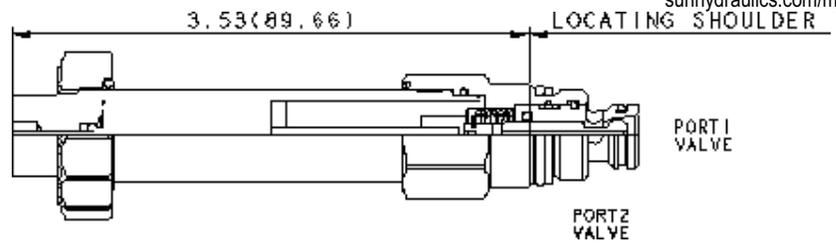

This FLeX Series solenoid-operated 2-way, 2-position cartridge is a direct-acting directional poppet valve. Available in either normally open or normally closed configurations, these valves feature a pressure-balanced design, low leakage, and allow flow or blocking in both directions.

This cartridge can be installed directly into a cavity in the end of many of Sun's pilot operated and ventable valves to provide integrated pilot control.

### CONFIGURATION

<b>M</b>	Control	Manual Override
<b>C</b>	Poppet Configuration	Normally Closed
<b>N</b>	Seal Material	Buna-N
<b>(none)</b>	Coil	No coil

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min. @350 bar
Viscosity Range	2,8 - 380 cSt
Response Time - Typical	50 ms
Switching Frequency	15,000 max. cycles/hr
U.S. Patent #	10,302,201
Seal kit - Cartridge	Buna: 990608007
Seal kit - Cartridge	Viton: 990608006

### NOTES

- For Series 1 cartridges configured with an O control (panel mount handknob), a .75 in. (19 mm) diameter hole is required in the panel.
- Please verify cartridge clearance requirements when choosing a Sun manifold. Different valve controls and coils require different clearances.
- An additional 2.00 inches (50,8 mm) beyond the valve extension is needed for coil installation and removal.

### CONFIGURATION OPTIONS

Model Code Example: DTAFMCN

CONTROL	(M) POPPET CONFIGURATION	(C) SEAL MATERIAL	(N) COIL *
<b>M</b> Manual Override	<b>C</b> Normally Closed	<b>N</b> Buna-N	No coil
<b>X</b> No Manual Override	<b>H</b> Normally Open	<b>E</b> EPDM	* Additional coil options are available
<b>D</b> Twist/Lock (Dual) Manual Override		<b>V</b> Viton	
<b>L</b> Twist/Lock (Detent) Manual Override			
<b>T</b> Twist (Momentary) Manual Override			