

**TECHNICAL DATA**

Body Type	Line mount
Interface	None
Body Features	Ninety degree with reverse flow check - reducing
Includes integral cartridge(s)	Yes (see Included Components)
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-2A
Port Size	1/2" BSPP
Model Weight	0.89 kg.

**NOTES**

**Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## PORT DESIGNATORS

Modifiers	Ports
B2V, /10, /11, /15, /16, /V	Ports 1 & 2: 1/2" BSPP; Port 3: 1/4" BSPP; Gage Port: 1/4" BSPP;

## INCLUDED COMPONENTS

Part	Description	Quantity
CXEDXCN	Cartridge	1

## CONFIGURATION OPTIONS

Model Code Example: B2V

### MODIFIER

6061-T651 Aluminum, Buna-N

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/V 6061-T651 Aluminum, Viton

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black


/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

## MANIFOLD FACES


### FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


### Face 2

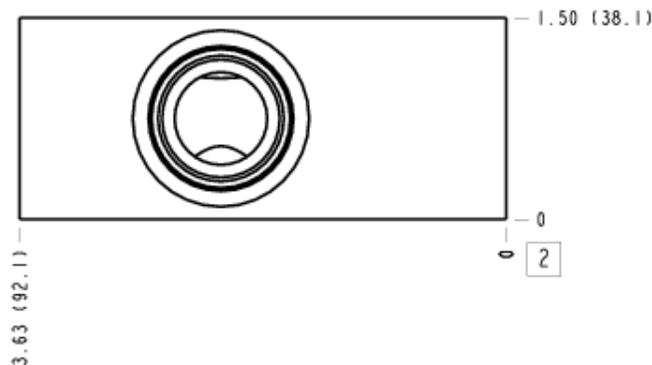


### Face 5

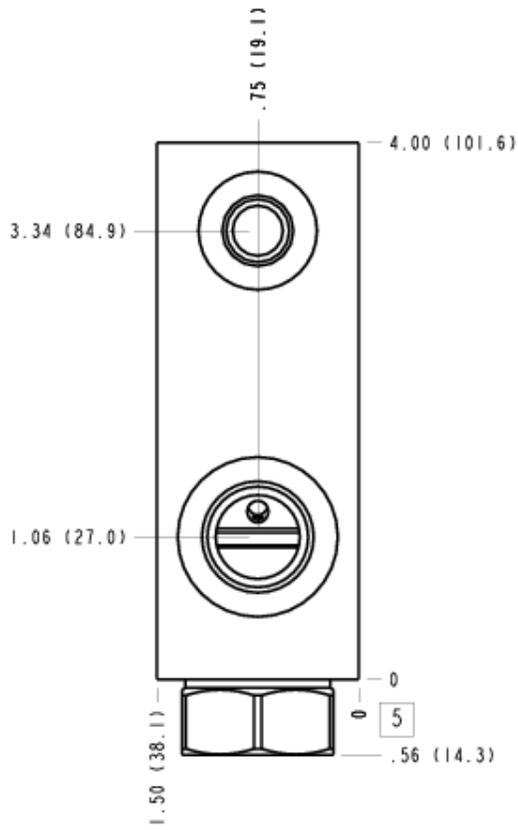

### Face 6

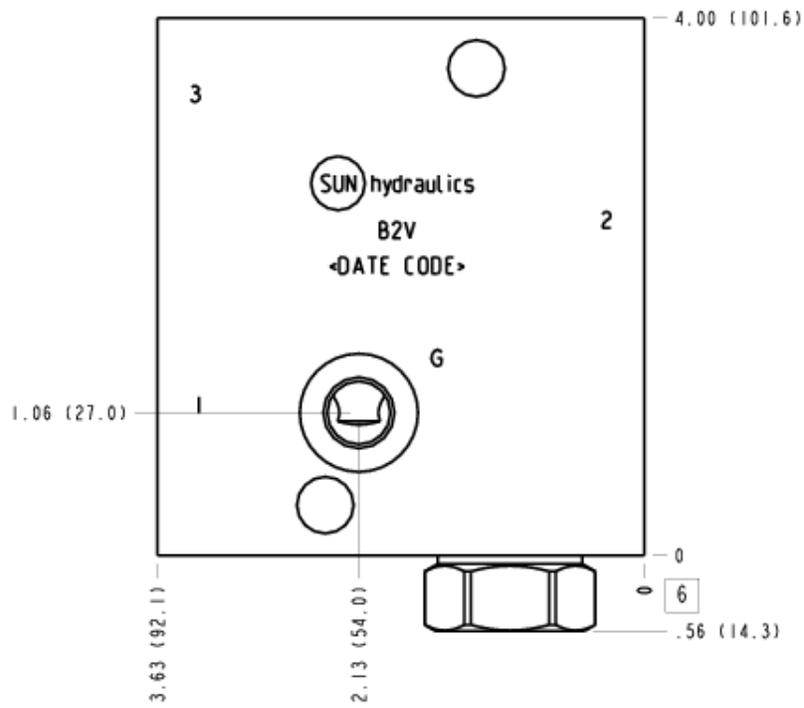

### Face 7

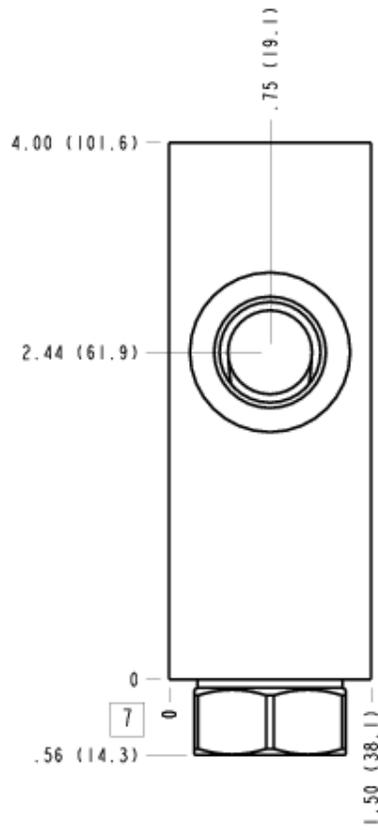

### Face 10

