


T-Control, C-Poppet

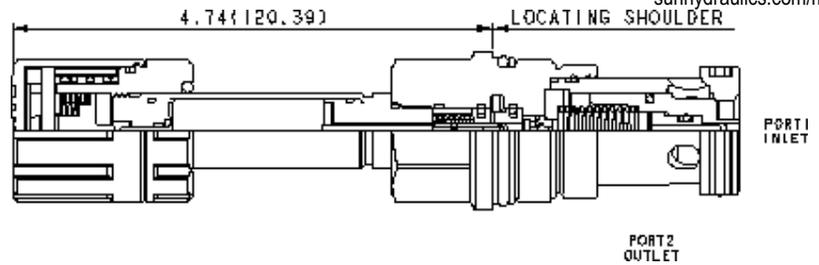

### CONFIGURATION

<b>T</b>	Control	Twist (Momentary) Manual Override
<b>C</b>	Poppet Configuration	Normally Closed
<b>N</b>	Seal Material	Buna-N
<b>(none)</b>	Coil	No coil

This solenoid controlled, 2-way, 2-position cartridge is a pilot-operated, poppet style directional valve with reverse free flow check. It is available in either a normally open or normally closed configuration. Due to its poppet style construction, it has extremely low leakage.

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Check Cracking Pressure	3,5 bar
Response Time - Typical	30 ms
Switching Frequency	15,000 max. cycles/hr
Seal kit - Cartridge	Buna: 990016007
Seal kit - Cartridge	EPDM: 990016014
Seal kit - Cartridge	Viton: 990016006

### NOTES

- Please verify cartridge clearance requirements when choosing a Sun manifold. Different valve controls and coils require different clearances.
- An additional 2.00 inches (50,8 mm) beyond the valve extension is needed for coil installation and removal.

### CONFIGURATION OPTIONS

#### Model Code Example: DFEATCN

CONTROL	(T) POPPET CONFIGURATION	(C) SEAL MATERIAL	(N) COIL *
<b>T</b> Twist (Momentary) Manual Override	<b>C</b> Normally Closed	<b>N</b> Buna-N	No coil
<b>X</b> No Manual Override	<b>H</b> Normally Open	<b>E</b> EPDM	<b>212</b> DIN 43650-Form A, 12 VDC
<b>D</b> Twist/Lock (Dual) Manual Override		<b>V</b> Viton	<b>224</b> DIN 43650-Form A, 24 VDC
<b>L</b> Twist/Lock (Detent) Manual Override			<b>912</b> Deutsch DT04-2P, 12 VDC
<b>M</b> Manual Override			<b>924</b> Deutsch DT04-2P, 24 VDC

\* Additional coil options are available