

CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Through port with gauge port
Mounting Hole Thread	M6x1.0 - 6H
Mounting Hole Depth	12,7 mm
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-3A
Port Size	3/4" BSPP
Model Weight	1.08 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
CEW, /10, /11	Ports 1 & 2: 3/4" BSPP; Gage Ports: 1/4" BSPP;

CONFIGURATION OPTIONS

Model Code Example: CEW/S

MODIFIER (S)


- /S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- 6061-T651 Aluminum, Buna-N
- /11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

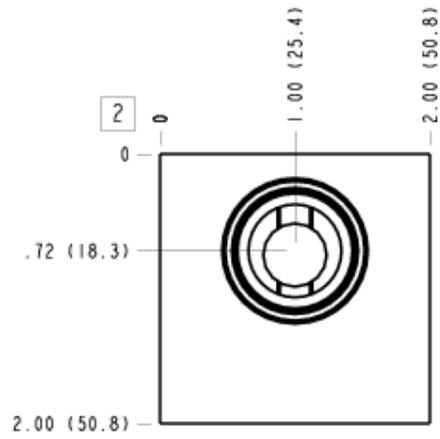


Face 5

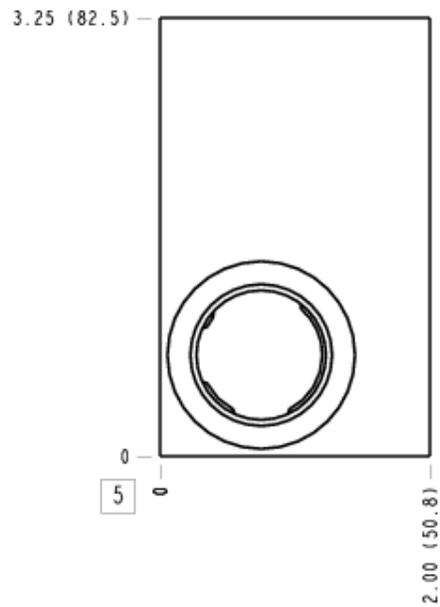


Face 6

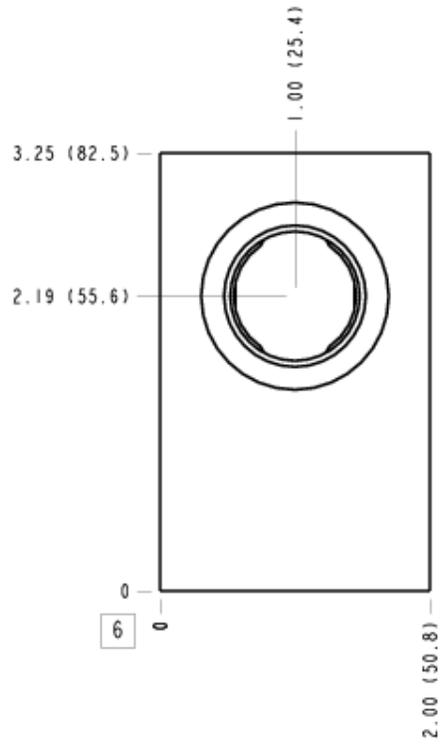

Face 7

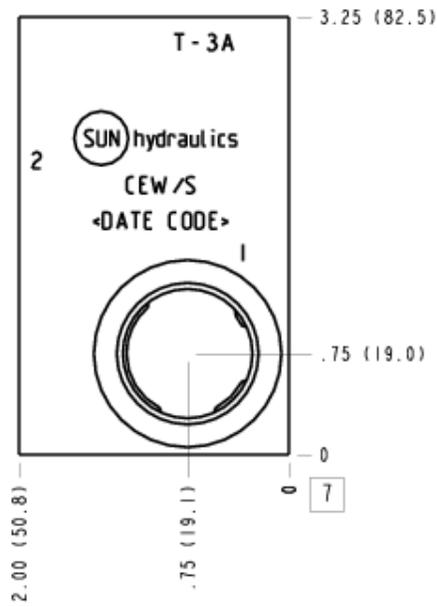

Face 8

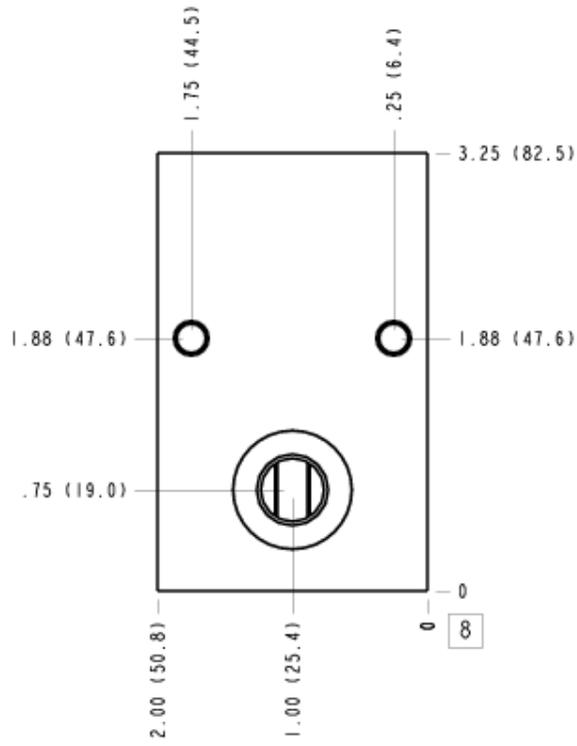

Face 10

