

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Through port 1 with gauge port
Mounting Hole Thread	M6x1.0 - 6H
Mounting Hole Depth	12,7 mm
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-162A
Port Size	1/4" BSPP
Model Weight	0.54 kg.

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
AET, /10, /11	Ports 1 & 2: 1/4" BSPP; Gage Port: 1/4" BSPP;

CONFIGURATION OPTIONS
Model Code Example: AET/S


- MODIFIER** (S)
- /S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
 - 6061-T651 Aluminum, Buna-N
 - /11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
 - /10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
 - /S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
 - /S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

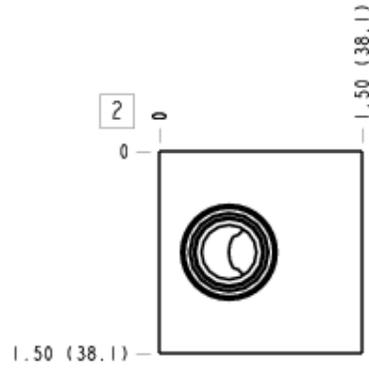


Face 5

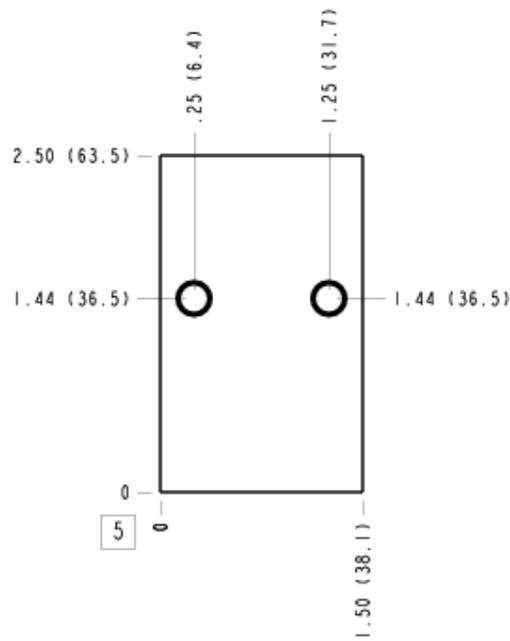


Face 6

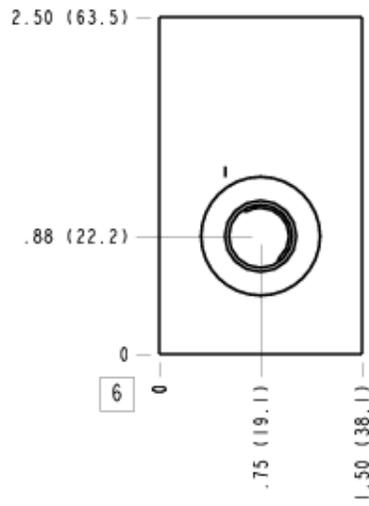

Face 7

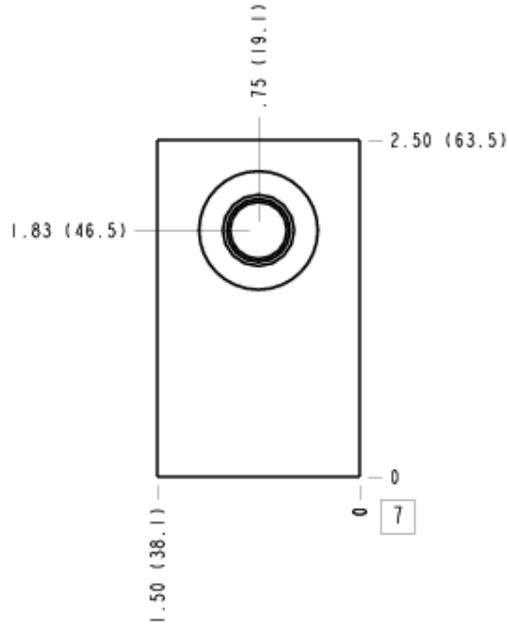

Face 8

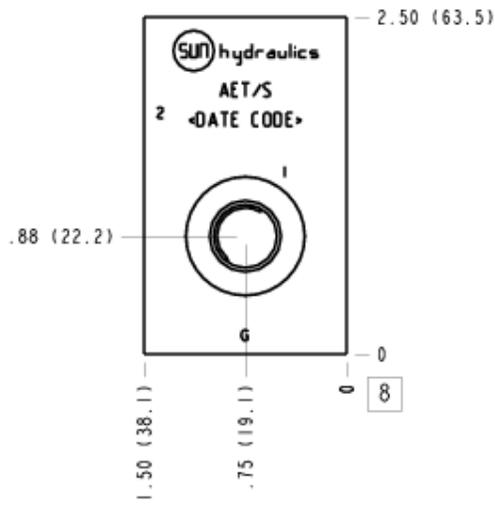

Face 10

