
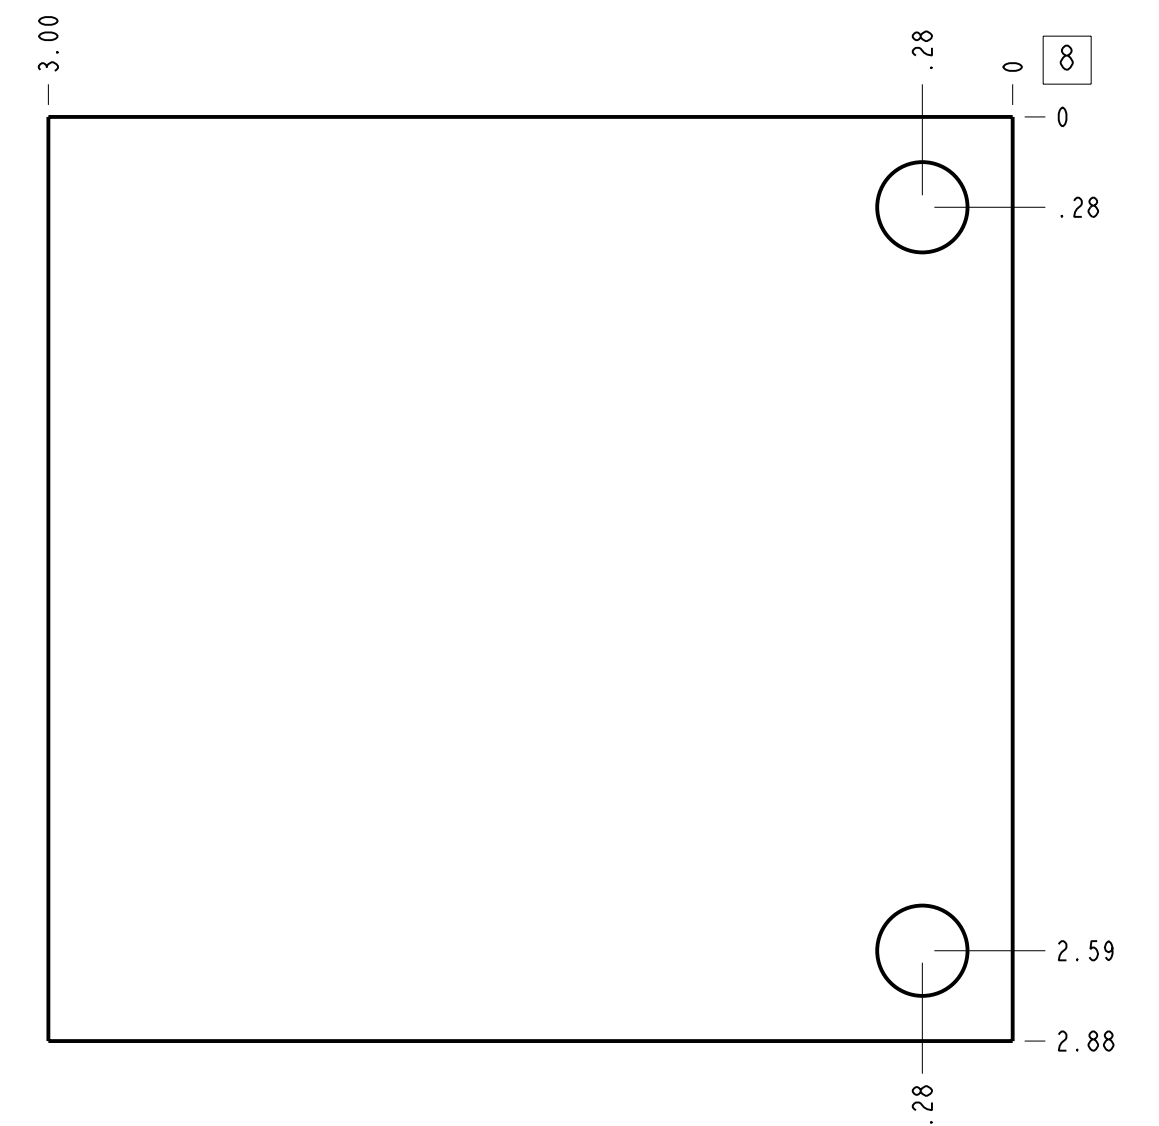
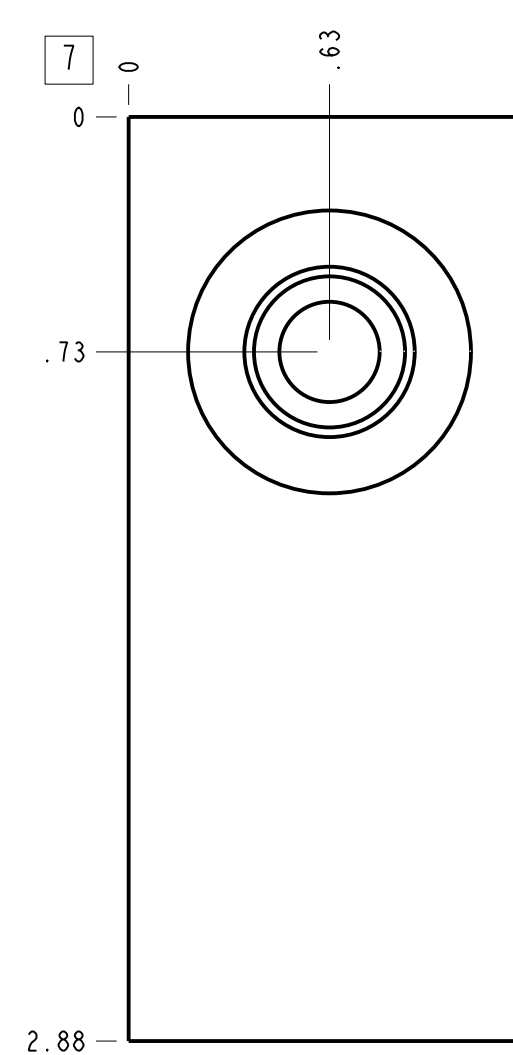
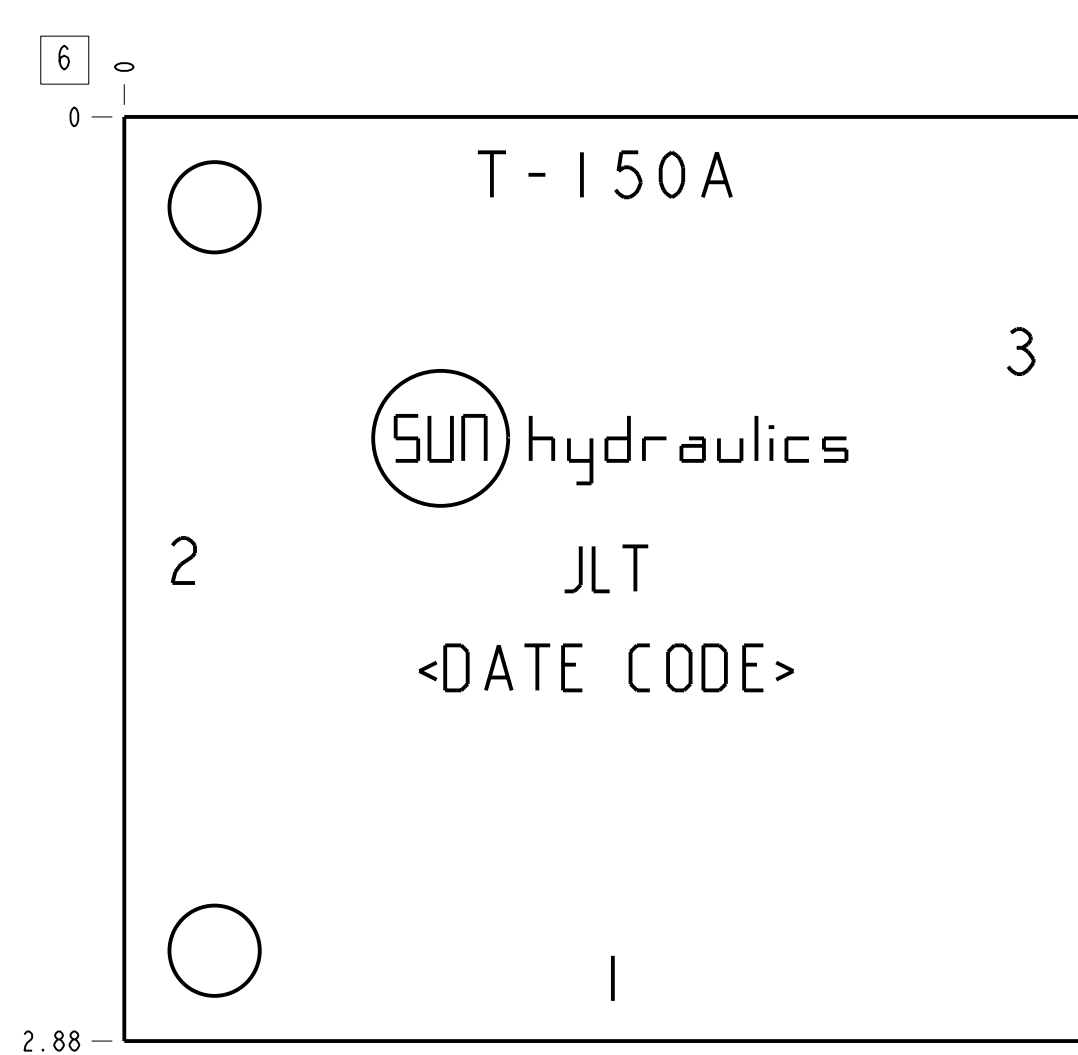
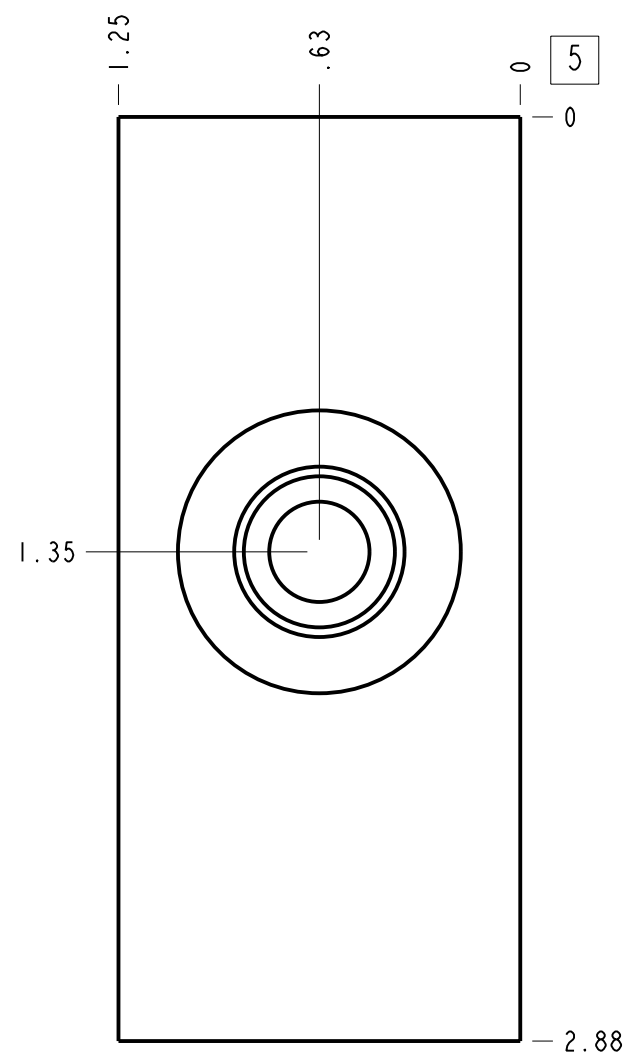
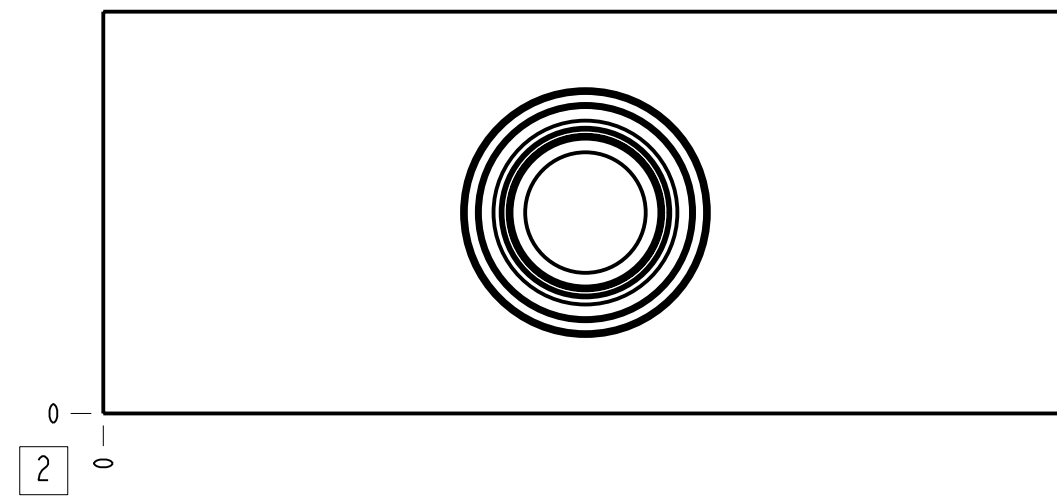


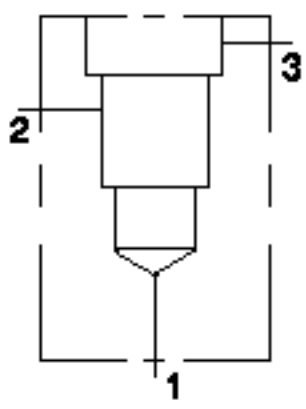

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
JLT	All Ports	1/4" BSP

	Technical Data	U.S. Units	Metric Units
Maximum Operating Pressure - 6061-T651 Aluminum Maximum Operating Pressure - 65-45-12 Ductile Iron	Cavity	T-150A	
	Body Features	Ninety degree	
	Body Type	Line mount	
	Interface	None	
	Open Cavity Quantity	1	
	Weight	0.941 lb.	0,427 kg.
	Operating Pressure - 6061-T651 Aluminum	3000 psi	210 bar
	Operating Pressure - 65-45-12 Ductile Iron	5000 psi	350 bar
	Mounting Hole Diameter	.28 in.	7,1 mm
	Mounting Hole Depth	Through	
Mounting Hole Quantity	2		

I	17G-199-007		6061-T6 ALUMINUM	BODY		I
ITEM	PART NO.	SETTING	MATERIAL	PART NAME		QTY
MODEL JLT			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		   	
DESCRIPTION T-150A Line mount Ninety degree			DATE Sep-09-24	SCALE 1.674	DWG SIZE C	SHEET I
						